

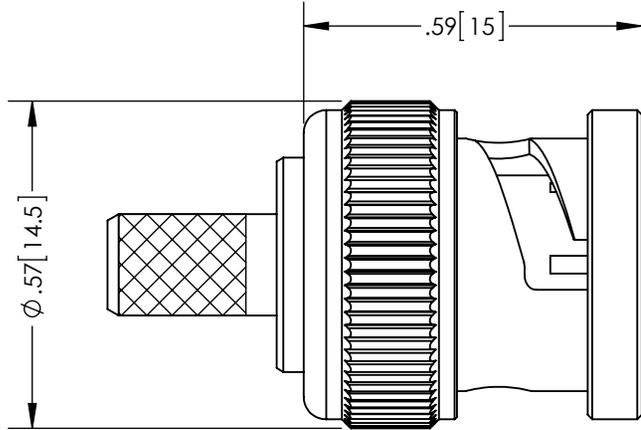



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	2/6/14	D.GRIFFIN

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL
INSULATOR	PTFE	-
CENTER PIN	BRASS	GOLD
FERRULE	BRASS	NICKEL
SHELL	BRASS	NICKEL
WASHER	BRASS	NICKEL
CURVED WASHER	HIGH CARBON STEEL	NICKEL
RETAINING RING	BRASS	NICKEL
GASKET	RUBBER	-



RECOMMENDED FERRULE CRIMP SIZE

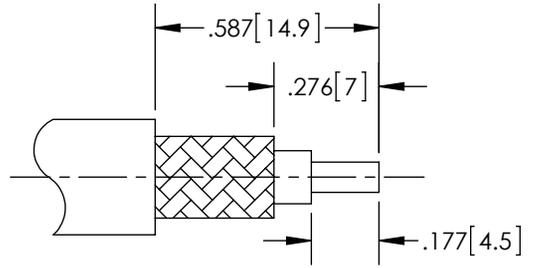

RECOMMENDED CABLE STRIPPING

**NOTES:**

**ELECTRICAL:**

IMPEDANCE: 50 Ohms  
 DIELECTRIC WITH STAND VOLTAGE: 1500V RMS  
 FREQUENCY RANGE: DC ~ 4 GHz  
 VOLTAGE RATING: 500V PEAK  
 INSERTION LOSS: .20dB MAX.  
 CABLE RETENTION: 30 lbs. PULL.

**MISCELLANEOUS:**

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY

**REGULATORY COMPLIANCE:**

CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]  DIMENSIONAL TOLERANCES: .X = ±.1 [2.54] .XX = ±.01 [.25] .XXX = ±.005 [.13]  ANGULAR TOLERANCES: ALL = ± 1°  PROJECTION	APPROVALS B.PUCHASKI CHECKED BY K.BURGNER APPROVED BY P.PESA	DATE 02/05/14 02/05/14 02/05/14	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY COAXIAL	
	COLOR VARIATIONS MAY OCCUR		PRODUCT DESCRIPTION BNC MALE SOLDERLESS CRIMP CONNECTOR FOR LMR195	REV. A
	SIZE A	FSCM NO. 43321	DWG. NO. ABM-1704	SCALE: NONE CAD FILE: ABM-1704.SLDDRW SHEET 1 OF 1