


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/20/13	D.GRIFFIN
B	ECN7073 DIELECTRIC WITHSTANDING VOLTAGE TO 4000 VRMS (AT SEA LEVEL)	09/20/13	B.PUCHASKI

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	SILVER
SHELL	BRASS	NICKEL
INSULATOR	PTFE	---
CENTER PIN	BRASS	SILVER
PIN	BRASS	SILVER
O-RING	RUBBER	---

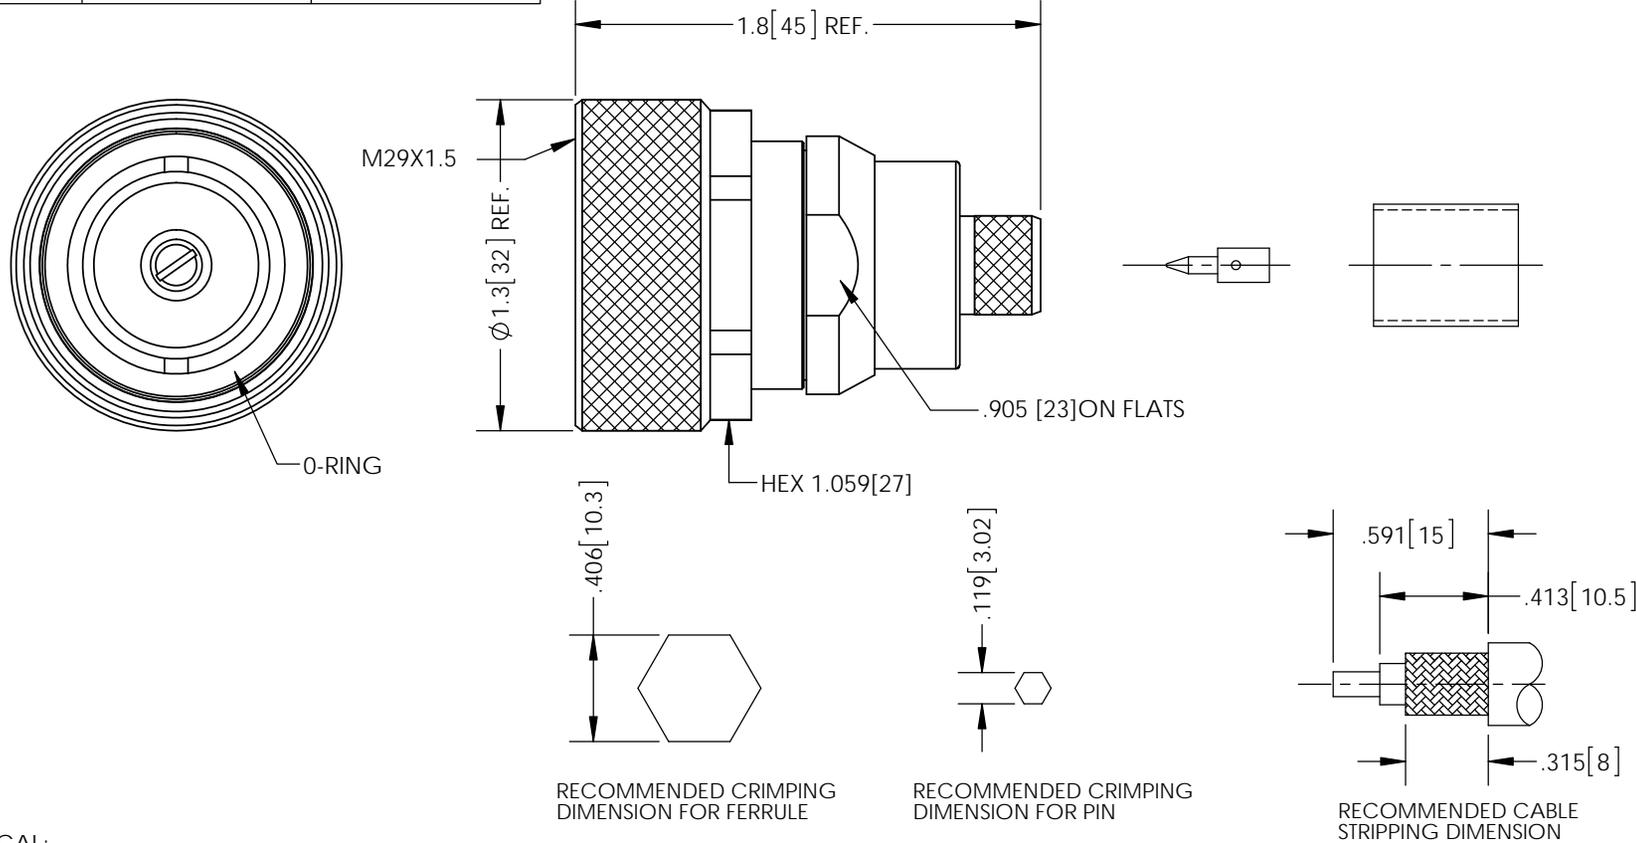

**NOTES:**  
 ELECTRICAL:  
 IMPEDANCE: 50OHM  
 FREQUENCY RANGE: DC-6 GHz  
 INSERTION LOSS: .2 dB MAX.  
 WORKING VOLTAGE: 2700 VRMS MAX.  
 DIELECTRIC WITHSTANDING VOLTAGE: 4000 VRMS MIN. (AT SEA LEVEL)



**PACKAGING:**  
 COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PKG-00012

**REGULATORY COMPLIANCE:**  
 RoHS, CE

RECOMMENDED CRIMPING DIMENSION FOR FERRULE

RECOMMENDED CRIMPING DIMENSION FOR PIN

RECOMMENDED CABLE STRIPPING DIMENSION

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]  DIMENSIONAL TOLERANCES: .X = ±.1 [2.54] .XX = ±.01 [.25] .XXX = ±.005 [.13]  ANGULAR TOLERANCES: ALL = ± 1°	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY B.PUCHASKI	09/04/13		
	CHECKED BY K.BURGNER	09/04/13	CATEGORY COAXIAL	
	APPROVED BY P.PESA	09/04/13	PRODUCT DESCRIPTION 7/16 DIN MALE CRIMP CONNECTOR FOR LMR400	
COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>ADM-1400</b>	REV. <b>B</b>
SCALE: NONE		CAD FILE: ADM-1400.SLDDRW		SHEET 1 OF 1