
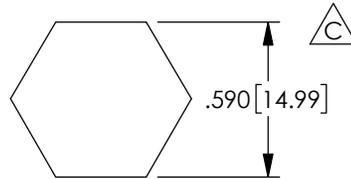


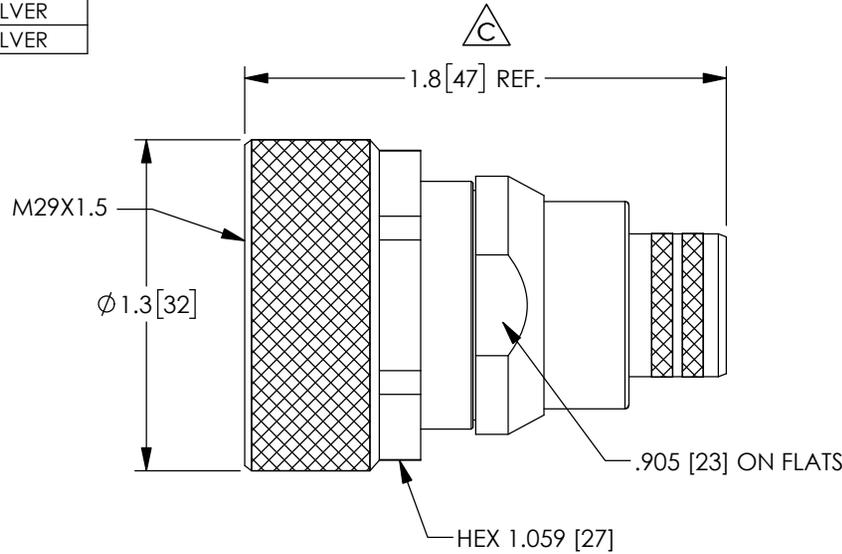



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	SILVER
SHELL	BRASS	NICKEL
INSULATOR	PTFE	---
CENTER PIN	BRASS	SILVER
PIN	BRASS	SILVER


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/05/2013	D.GRIFFIN
B	ECN7073 DIELECTRIC WITHSTANDING VOLTAGE TO 4000 VRMS (AT SEA LEVEL)	09/20/2013	BPUCHASKI
C	ECN 11599: REVISED DIMENSIONS AND CRIMP DIMENSIONS	01/11/2022	SRAUTUS

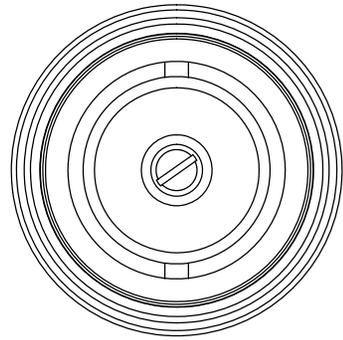

RECOMMENDED CRIMPING DIMENSION FOR FERRULE



RECOMMENDED CRIMPING DIMENSION FOR PIN

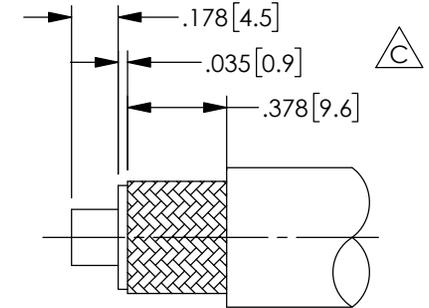

RECOMMENDED CABLE STRIPPING DIMENSION




NOTES:

ELECTRICAL:
 IMPEDANCE: 50OHM
 FREQUENCY RANGE: DC~6 GHz
 INSERTION LOSS: .2 dB MAX.
 WORKING VOLTAGE: 2700 VRMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE: 4000 VRMS MIN. (AT SEA LEVEL)

PACKAGING:
 COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [5] ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936		
	DRAWN BY BPUCHASKI	09/04/2013		CATEGORY COAXIAL	
CHECKED BY K.BURNINGER	09/04/2013	PRODUCT DESCRIPTION 7/16 DIN Male Crimp Connector for LMR600			
APPROVED BY P.PESA	09/04/2013		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		
THIRD-ANGLE PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE A	CAGE CODE 43321	ITEM NO. ADM-1600	REV. C
SCALE: NONE		CAD FILE: ADM-1600.SLDDRW		SHEET 1 OF 1	