
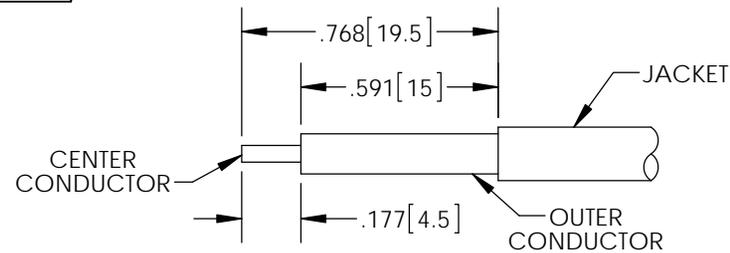

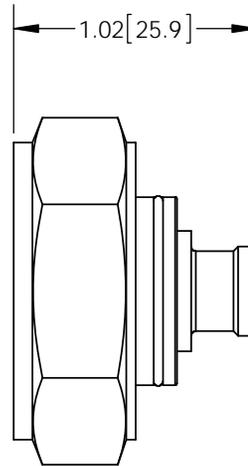


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/28/15	D.GRIFFIN

DESCRIPTION	MATERIAL	FINISH
NUT	BRASS	NICKEL
GASKETS	SILICONE RUBBER	---
BODY	BRASS	CuSnZn3
INSULATOR	PTFE	SILVER
CENTER CONTACT	BRONZE	SILVER

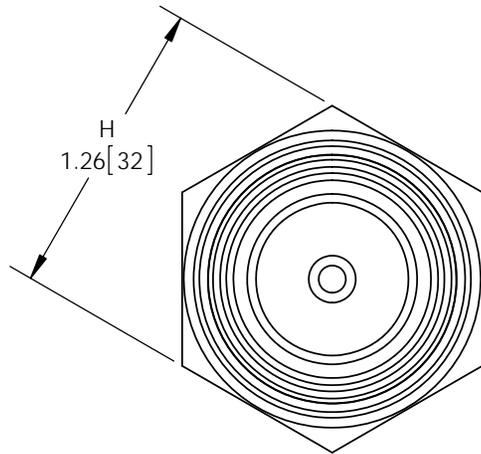

RECOMMENDED CABLE STRIPPING

NOTES:

ELECTRICAL:
 IMPEDANCE: 50OHM
 FREQUENCY RANGE: DC~2.7 GHz
 VSWR: ≤ 1.12
 PASSIVE INTERMODULATION(PIM): ≤ -160dBc@900MHZ
 DIELECTRIC WITHSTANDING VOLTAGE: 2500V
 INSERTION LOSS: ≤ .05 dB
 INSULATION RESISTANCE: ≥ 5000M OHM

MECHANICAL:
 DURABILITY: ≥ 500
 INTERFACE DIMENSIONS CONFORMABLE TO IEC 60169

PACKAGING:
 COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PKG-00012

REGULATORY COMPLIANCE:
 CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] DIMENSIONAL TOLERANCES: .X = ±.1 [2.54] .XX = ±.01 [25] .XXX = ±.005 [13] ANGULAR TOLERANCES: ALL = ± 1°	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY B.PUCHASKI	09/28/15		
	CHECKED BY K.BURGNER	09/28/15	CATEGORY COAXIAL	
	APPROVED BY P.PESA	09/28/15	PRODUCT DESCRIPTION 7/16 DIN MALE CONNECTOR, PIM RATED FOR RG401	
COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. ADM-1P100	REV. A
SCALE: NONE		CAD FILE: ADM-1P100.SLDDRW		SHEET 1 OF 1