
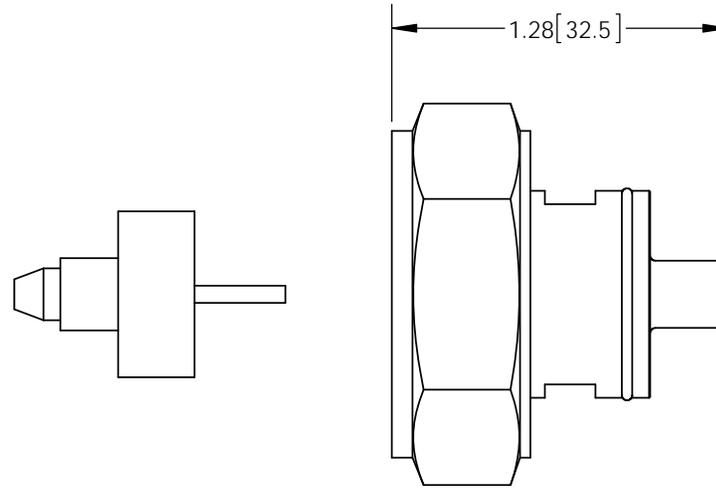



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/28/15	D.GRIFFIN
B	ECN8261 CHANGE STRIP DIM 1.250 TO .750 AND 1.457 TO .947	02/17/16	B.PUCHASKI

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	WHITE BRONZE
INSULATOR	PTFE	SILVER
CENTER CONTACT	BRONZE	SILVER

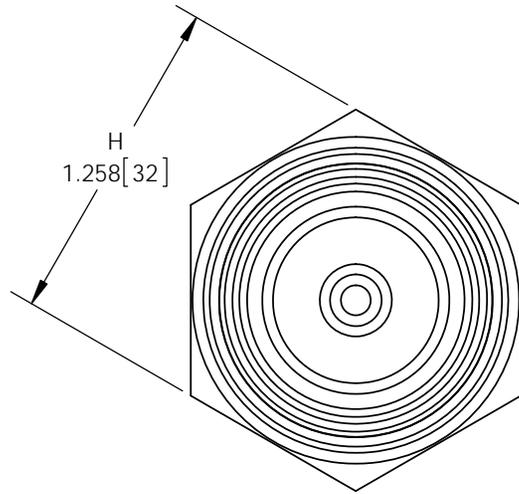

NOTES:
ELECTRICAL:
 IMPEDANCE: 50 OHM
 FREQUENCY RANGE: DC-2.7 GHz
 VSWR: ≤ 1.12
 PASSIVE INTERMODULATION(PIM): $\leq -160\text{dBc}@2\text{X}20\text{W}$
 DIELECTRIC WITHSTANDING VOLTAGE: 1500V
 INSULATION RESISTANCE: $\geq 5000\text{M OHM}$
 CONTACT RESISTANCE:
 CENTER CONTACT: $\leq 0.4\text{m OHM}$
 OUTER CONTACT: $\leq 1.5\text{m OHM}$

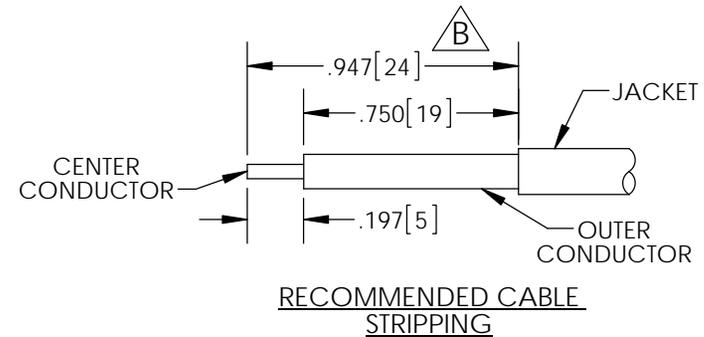

MECHANICAL:
 DURABILITY: ≥ 500
 INTERFACE DIMENSIONS CONFORMABLE TO IEC 169-4, CECC22190

PACKAGING:
 COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PKG-00012

REGULATORY COMPLIANCE:
 CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] DIMENSIONAL TOLERANCES: .X = ± 0.1 [2.54] .XX = ± 0.01 [.25] .XXX = ± 0.005 [.13] ANGULAR TOLERANCES: ALL = $\pm 1^\circ$	APPROVALS B.PUCHASKI CHECKED BY K.BURGNER APPROVED BY P.PESA	DATE 09/28/15 09/28/15 09/28/15		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CATEGORY COAXIAL			PRODUCT DESCRIPTION 7/16 DIN MALE CONNECTOR, PIM RATED FOR RG402
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A FSCM NO. 43321 DWG. NO. ADM-1P200	
	PROJECTION 	COLOR VARIATIONS MAY OCCUR		SCALE: NONE CAD FILE: ADM-1P200.SLDDRW