
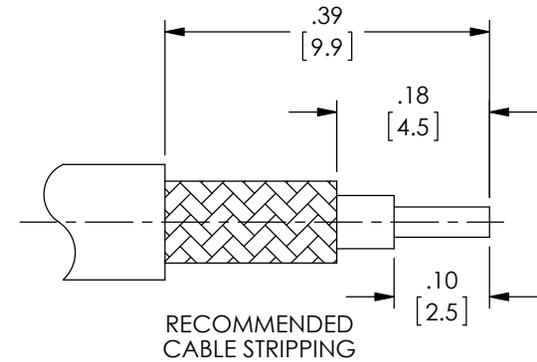
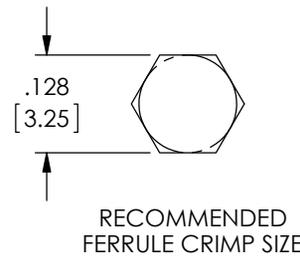

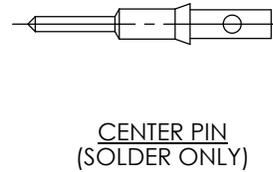


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/6/07	P. PESA
B	ECN 4698: UPDATE TO NEW SUPPLIER SPECS	4/21/10	D. CASTRO
C	ECN 6667: UPD CENTER PIN SOLDER ONLY, FERRULE CRIMP & CABLE STRIP DIM.	2/4/13	D. DESJARDIN
D	ECN 6907: ADDED ROHS NOTE, UPDATED PACKAGING TO INDIVIDUAL	6/18/13	D. FRISIELLO

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL
CENTER PIN	BRASS	GOLD
INSULATOR	TFE	-
FERRULE	BRASS	NICKEL

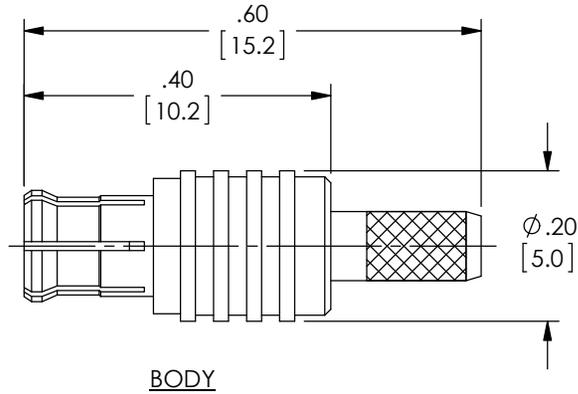

NOTES:

ELECTRICAL:
 IMPEDANCE: 50 OHMS
 FREQUENCY RANGE: DC ~ 6 GHz
 VOLTAGE RATING: 335 VOLTS PEAK
 WITHSTAND VOLTAGE: 1000V RMS.
 CABLE RETENTION: 3 lbs. PULL

MISCELLANEOUS:
 COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

REGULATORY COMPLIANCE:
 ROHS, CE

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]. OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY M. AUDUS	11/6/07		CATEGORY COAXIAL
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY K. BURGNER	7/21/06	PRODUCT DESCRIPTION CON, MCX MALE STR CRIMP LMR100	
PROJECTION 	APPROVED BY P. PESA	11/6/07		
	COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: AMM-1102.SLDRW
	1AB14-037			SHEET 1 OF 1