

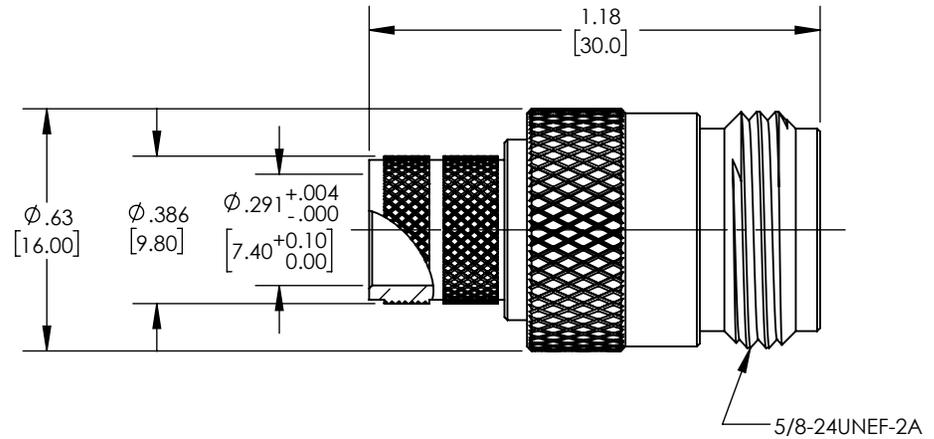



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	UPDATED FORMAT AND CONNECTOR INFO ECN#4368	11/11/09	BPUCHASKI
C	ECN 11847: UPDATE MODELS, DIM'S AND PIN MATERIAL	05/16/2022	V.JIWATODE


DESCRIPTION	MATERIAL	FINISH
CENTER CONTACT	PHOSPHOR BRONZE	GOLD
BODY	BRASS	NICKEL
FERRULE	BRASS	NICKEL
INSULATOR	PTFE	-

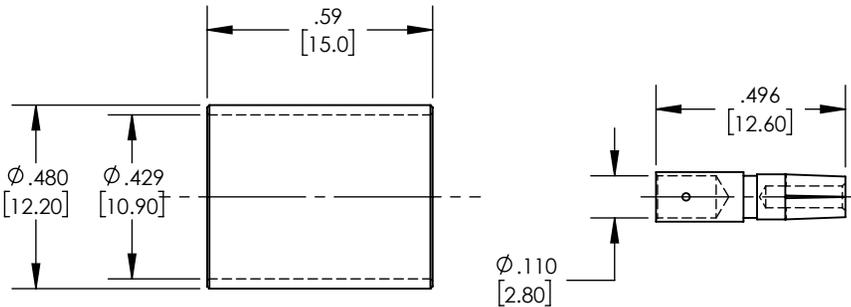

RECOMMENDED
FERRULE
CRIMP SIZE



RECOMMENDED
PIN
CRIMP SIZE

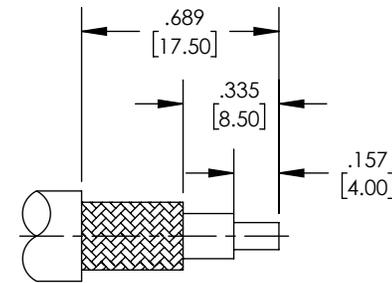

RECOMMENDED CABLE
STRIPPING


NOTES:

ELECTRICAL:

IMPEDENCE: 50 OHMS
 WITHSTAND VOLTAGE: 2500V
 FREQUENCY RANGE: 0~6 GHz
 VSWR: ≤ 1.5 @ 0~6 GHz
 DURABILITY: ≥ 500 CYCLES
 CABLE RETENTION: > 40 POUNDS

MISCELLANEOUS:

COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936	
	DRAWN BY BPUCHASKI	11/11/09		CATEGORY COAXIAL
	CHECKED BY MAUDAS	11/11/09		
	APPROVED BY MAUDAS	11/11/09		
THIRD-ANGLE PROJECTION	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION N STRAIGHT FEMALE JACK CRIMP FOR RG8 / LMR400	SCALE: NONE	
	COLOR VARIATIONS MAY OCCUR	SIZE A	CAGE CODE 43321	
		DWG. NO. ANF-1406	SHEET 1 OF 1	