


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	Initial Release	12/02/09	B.Puchaski
B	ECNS721: .100 WAS .067. CHANGED CTR PIN PICTORIALLY. CORRECTED TYPO & FORMAT	09/21/11	DFP

DESCRIPTION	MATERIAL	FINISH
CENTER CONTACT	BRASS	GOLD
OUTER CONTACT	BRASS	NICKEL
BODY	BRASS	NICKEL
CRIMP FERRULE	BRASS	NICKEL
INSULATOR	TEFLON	---

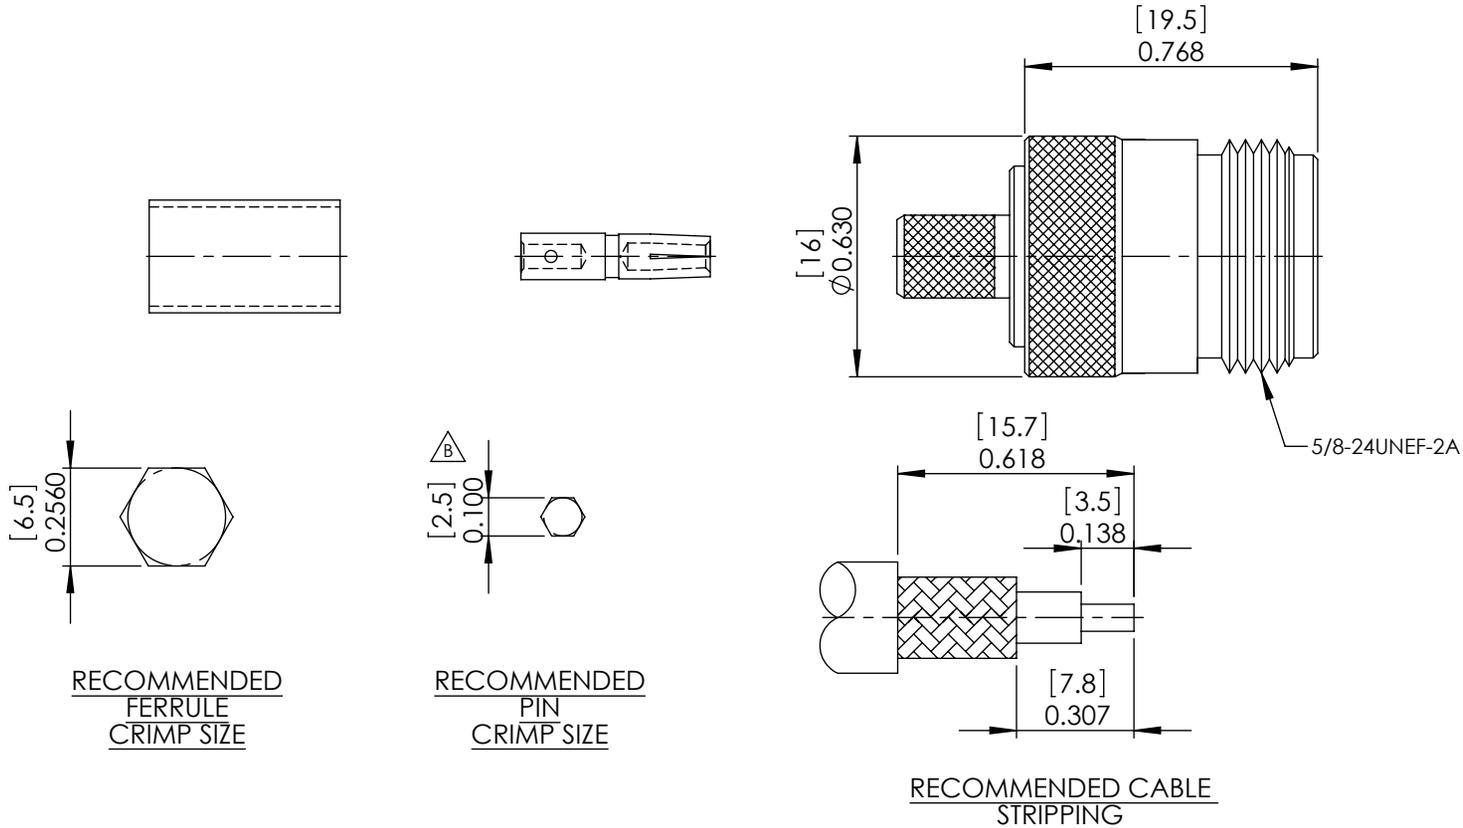

**NOTES:**

**ELECTRICAL:**

IMPEDANCE: 50 OHMS  
 WITHSTAND VOLTAGE: 2500V  
 FREQUENCY RANGE: 0~6 GHz  
 VSWR: <1.50 @ 0~6 GHz  
 DURABILITY: > 500 CYCLE  
 CABLE RETENTION: > 40 POUNDS

**MISCELLANEOUS:**

COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

**RoHS Compliant**

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	<b>L-com</b> Global Connectivity 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY B. Puchaski	12/02/09	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	CHECKED BY M. Audas	12/02/09	CATEGORY <b>CONNECTOR</b>
	APPROVED BY M. Audas	12/02/09	PRODUCT DESCRIPTION <b>N STRAIGHT FEMALE CRIMP FOR LMR240</b>
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b> FSCM NO. <b>43321</b> DWG. NO. <b>ANF-1508</b> REV. <b>B</b>
SCALE: NONE		CAD FILE: ANF-1508.SLDDRW	SHEET 1 OF 1