
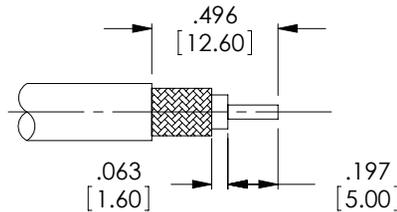


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	CHANGED STRIPPING DIM	11/12/07	M. AUDAS
C	ECN5132: UPDATED CONNECTOR AND FORMAT. ADDED PACKAGING NOTE.	11/12/10	DFP

DESCRIPTION	MATERIAL	FINISH
MAIN BODY	BRASS	NICKEL
INSULATOR	PTFE	NICKEL
CENTER PIN	BRASS	GOLD
CLAMP	BRASS	NICKEL
GASKET	RUBBER	----
WASHER	BRASS	NICKEL
NUT	BRASS	NICKEL

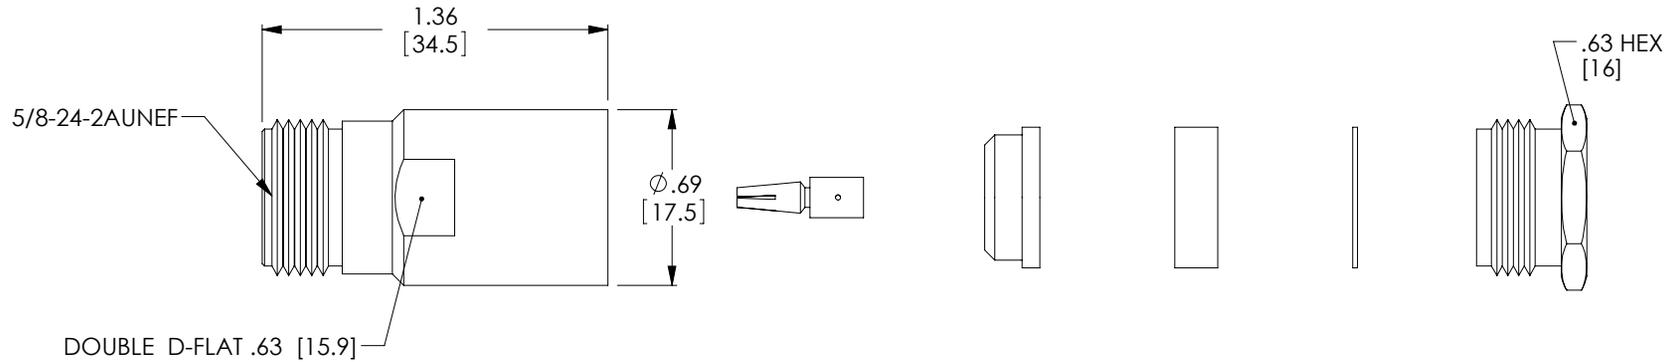

RECOMMENDED CABLE STRIPPING

NOTE:
ELECTRICAL
IMPEDANCE: 50 OHM
FREQUENCY RANGE: DC - 11 GHz
VOLTAGE RATING: 1500V PEAK
DIELECTRIC WITHSTANDING VOLTAGE: 2500 Vrms
INSERTION LOSS: .20dB MAX.

MISCELLANEOUS
CONNECTOR IS INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031
ALL DIMENSIONS FOR REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY M. AUDAS	11/12/2007		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY M. AUDAS	11/12/2007	CATEGORY COAXIAL	
	APPROVED BY P. PESA	11/12/2007	PRODUCT DESCRIPTION CON,N-FEMALE CLAMP LMR400	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
			DWG. NO. ANF-2400	REV. C
			SCALE: NONE	CAD FILE: ANF-2400.SLDDRW
				SHEET 1 OF 1