



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
C	ECN 4664: REDRAWN AND NEW FORMAT	4/7/10	D.FRISIELLO
D	ECN 4752: REVISED FREQUENCY RANGE TO 6 GHz	5/19/10	D.FRISIELLO
E	ECN 7335: REVISED PACKAGING TO INDIVIDUAL, ROHS, FORMAT	3/11/14	D.FRISIELLO

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL PLATE
FERRULE	BRASS	NICKEL PLATE
CENTER PIN	BRASS	GOLD PLATE
INSULATOR	PTFE	-
CAP	BRASS	NICKEL PLATE

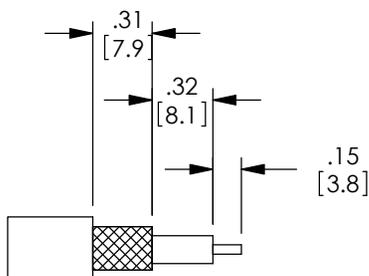


RECOMMENDED  
CABLE STRIPPING

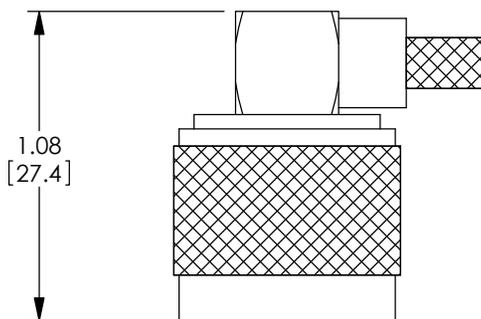

BODY



FERRULE



RECOMMENDED  
FERRULE CRIMP SIZE  
(PIN IS SOLDER TYPE)

NOTES:

IMPEDANCE: 50 OHM  
 FREQUENCY RANGE: DC ~ 6 GHz  
 VOLTAGE RATING: 1500 VOLTS  
 DIELECTRIC WITHSTANDING VOLTAGE: 2500 V rms  
 CABLE RETENTION: 30 LBS

APPLICATION: LOW-LOSS 195 SERIES & RG58.

**E** COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

**E** **REGULATORY COMPLIANCE:**  
 CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [1.27]	APPROVALS DRAWN BY D.FRISIELLO	DATE 4/6/10	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	CHECKED BY K.BURGNER	DATE 4/6/10		CATEGORY COAXIAL	
	APPROVED BY K.BURGNER	DATE 4/6/10	PRODUCT DESCRIPTION TYPE N MALE R.A. FOR 195R/RG58		
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. ANM-1716
SCALE: NONE		CAD FILE: ANM-1716.SLDDRW		SHEET 1 OF 1	