


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	UPDATED	11/27/2007	B.PUCHASKI
C	UPDATED	08/11/2009	B.PUCHASKI
D	ECN 8589 UPDATE PER VENDOR, ADD NOTE 1	12/29/16	B.PUCHASKI

DESCRIPTION	MATERIAL	FINISH
CENTER CONTACTS	BRONZE	GOLD
SHELL/BODY	BRASS	NICKEL
INSULATOR	TEFLON	---

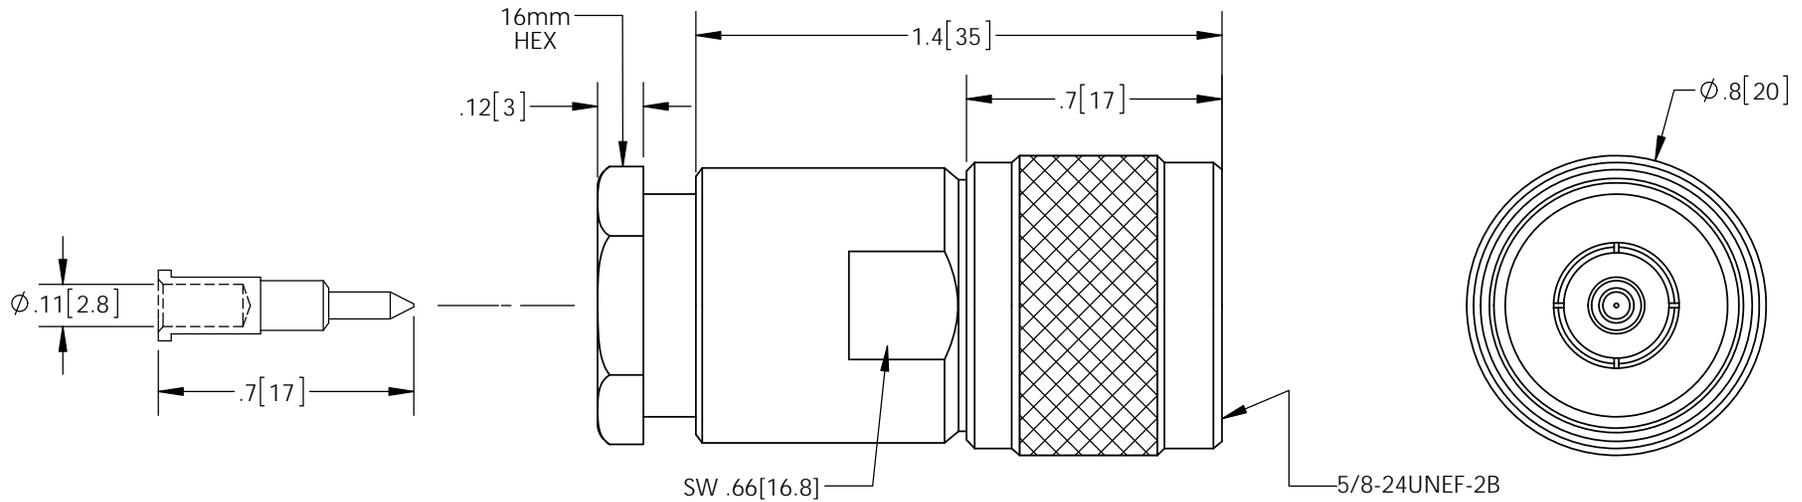

NOTES:

1- SEE USER MANUAL IP-00142 FOR CABLE ASSEMBLY INSTRUCTIONS

ELECTRICAL:

IMPEDENCE: 50 OHMS
 DIELECTRIC WITHSTAND VOLTAGE: 2500V (RMS)
 FREQUENCY RANGE: DC-6 GHz
 CONTACT RESISTANCE:
 CENTER CONDUCTOR: ≤ 1m OHM
 OUTER CONDUCTOR: ≤ 1m OHM
 INSULATION RESISTANCE: ≥ 5000M OHM

DURABILITY: ≥ 500 CYCLE

MISCELLANEOUS:

COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] DIMENSIONAL TOLERANCES: .X = ±.1 [2.54] .XX = ±.01 [.25] .XXX = ±.005 [.13] ANGULAR TOLERANCES: ALL = ± 1°	APPROVALS	DATE	 50 HIGH STREET NORTH ANDOVER, MA 01845	
	DRAWN BY B.PUCHASKI	11/27/2007		
	APPROVED BY M.AUDAS	11/27/2007	CATEGORY COAXIAL	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION N-MALE CLAMP CONNECTOR FOR 400 SERIES CABLE	
COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. ANM-2400	REV. D
SCALE: NONE		CAD FILE: ANM-2400.SLDDRW		SHEET 1 OF 1