
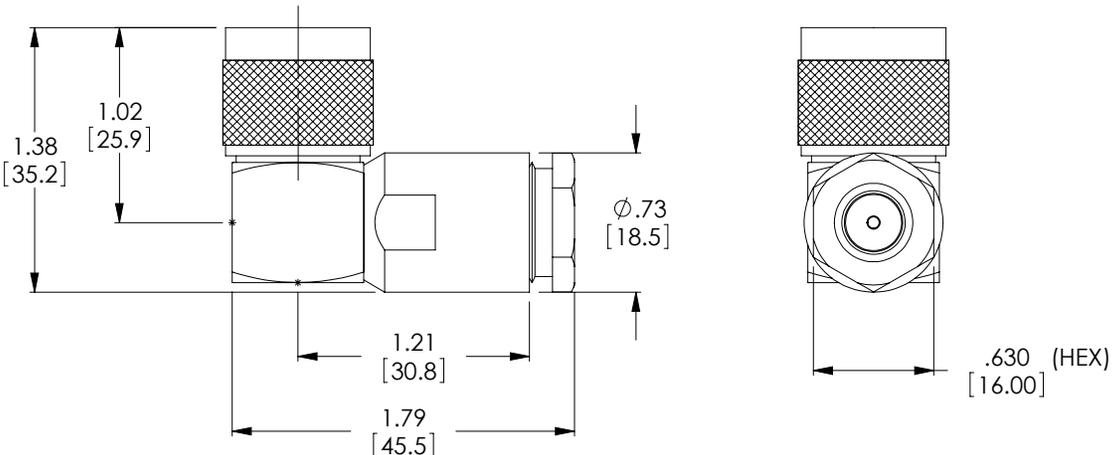


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	9/7/10	D.GRIFFIN

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL
CONTACT	PHOSPHOR BRONZE	GOLD
INSULATOR	PTFE	N/A
FASTENING NUT	BRASS	NICKEL
COUPLING NUT	BRASS	NICKEL
GASKET	MVQ	N/A
BUSHING	PHOSPHOR BRONZE	NICKEL
WASHERS 1 & 2	BRASS	NICKEL

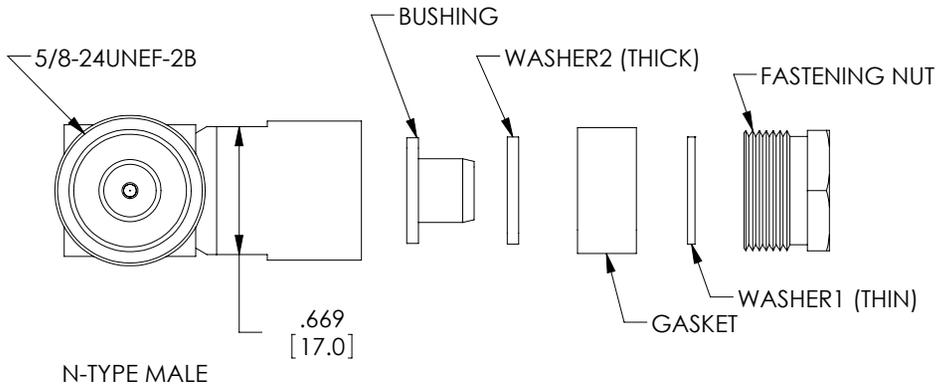

- NOTE**
1. REFERENCE DOCUMENT IP-0110 FOR CABLE ASSEMBLY INSTRUCTIONS.
  2. CONNECTOR SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.
  3. ELECTRICAL  
 VOLTAGE RATING: 1500 VOLTS PEAK  
 IMPEDANCE: 50Ω  
 FREQUENCY RANGE: DC~6GHz  
 DIELECTRIC WITHSTANDING VOLTAGE: 2500 Vrms  
 INSERTION LOSS: .20 dB MAX.
  4. MECHANICAL  
 MATING TORQUE: 15 INCH POUNDS (170 N.cm) MAX.  
 CABLE ATTACHMENT: CLAMP  
 CENTER CONDUCTOR ATTACHMENT: CRIMP OR SOLDER  
 CABLE RETENTION: 30 LBS. PULL

**RoHS Compliant** ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	APPROVALS DRAWN BY D. PARHAM CHECKED BY J. RUST APPROVED BY K. BURGNER	DATE 09/02/2010 09/03/2010 09/03/2010		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	CATEGORY <b>COAXIAL</b>	PRODUCT DESCRIPTION <b>CON, N-MALE CLAMP R/A LMR400</b>	SCALE: NONE CAD FILE: ANM-2402.SLDDRW	SHEET 1 OF 1
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>ANM-2402</b>	REV. <b>A</b>