



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/25/10	D.GRIFFIN
B	ECN 7098 UPDATE TO NEW SPECS	10/09/13	B.PUCHASKI


DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL PLATED
CONTACT PIN	BERYLLIUM COPPER ALLOY	GOLD PLATED
FERRULE	BRASS	NICKEL PLATED
WASHER	BRASS	NICKEL PLATED
JAM NUT	BRASS	NICKEL PLATED
INSULATOR	PTFE	-
GASKET	SILICONE RUBBER	-




FERRULE

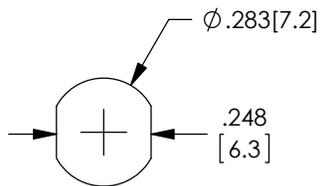


RECOMMENDED PANEL CUT OUT

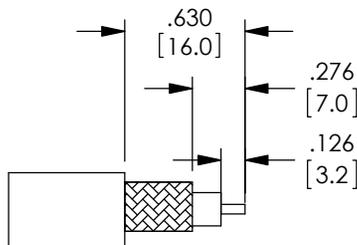

RECOMMENDED CABLE STRIPPING

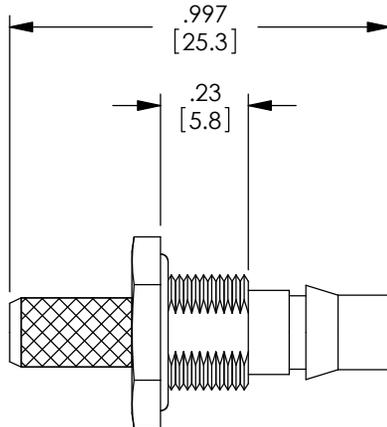

BODY




CONTACT PIN




WASHER



JAM NUT



RECOMMENDED FERRULE CRIMP SIZE



RECOMMENDED PIN CRIMP SIZE

NOTES:

ELECTRICAL:

IMPEDANCE: 50 OHMS
 FREQUENCY RANGE: DC ~ 6 GHz
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 V RMS
 DURABILITY: ≥ 100 MATING CYCLES
 CABLE RETENTION: > 40 POUNDS

MISCELLANEOUS:

APPLICATIONS: RG58, LMR195

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

COMPONENT ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

RoHS, CE

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.01 .XXX = ±.005 ANGULAR TOLERANCES: ALL = ± 1° PROJECTION	APPROVALS DRAWN BY D.FRISIELLO CHECKED BY K.BURGNER APPROVED BY K.BURGNER	DATE 3/24/10 3/24/10 3/24/10	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CATEGORY COAXIAL		PRODUCT DESCRIPTION QMA JACK BLKHD CRIMP RG58/LMR195
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		
	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321