
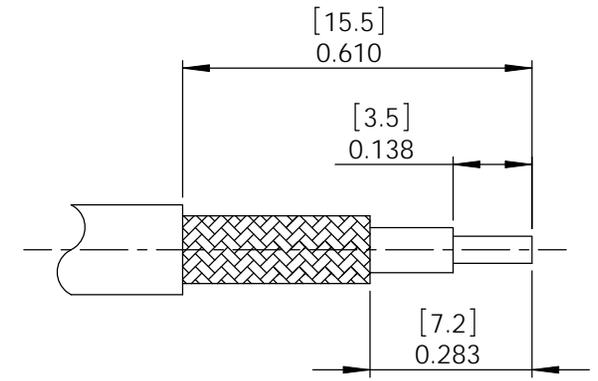
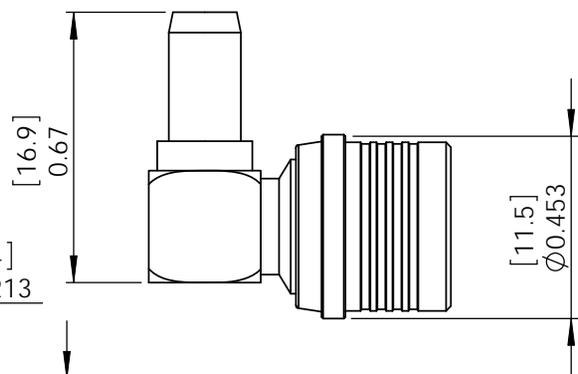
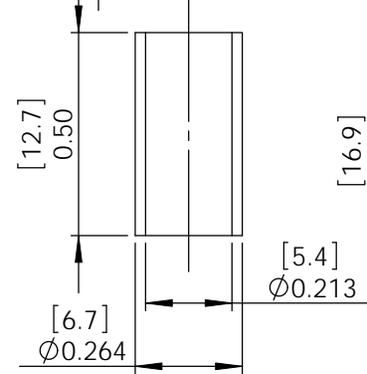
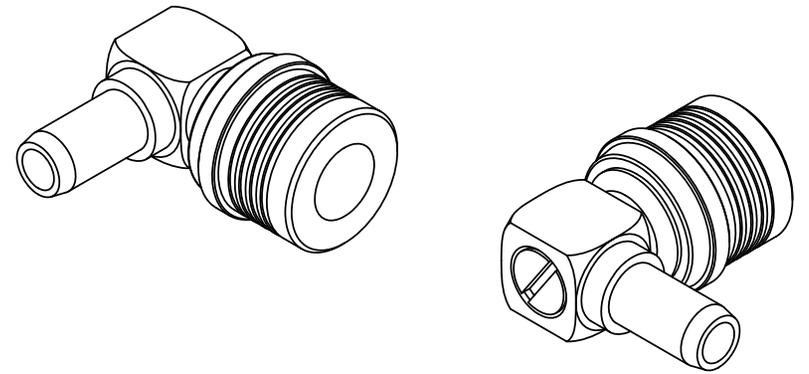


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	Initial Release	03/10/03	B.Puchaski
B	ENN#4828 New Design	06/10/10	B.Puchaski

DESCRIPTION	MATERIAL	FINISH
CENTER CONTACTS	BRASS	GOLD
BODY	BRASS	NICKEL
UNLOCK SLEEVE	BRASS	NICKEL
CRIMP FERRULE	BRASS	NICKEL
INSULATOR	PTFE	---

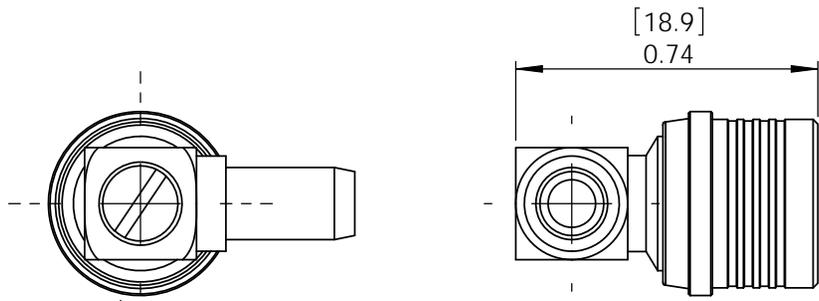

NOTES:
ELECTRICAL:
 IMPEDENCE: 50 OHMS
 WITHSTAND VOLTAGE: 1000V
 FREQUENCY RANGE: 0~18 GHz
 DURABILITY: ≥ 100 CYCLE
 CABLE RETENTION: > 40 POUNDS

MISCELLANEOUS:
 COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

RECOMMENDED FERRULE CRIMP SIZE

RECOMMENDED SOLDER PIN

RECOMMENDED CABLE STRIPPING

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]
 DIMENSIONAL TOLERANCES:
 .X = ±.1
 .XX = ±.01
 .XXX = ±.005
 ANGULAR TOLERANCES:
 ALL = ± 1°

APPROVALS	DATE
DRAWN BY B.Puchaski	03/10/10
CHECKED BY M.Audas	03/10/10
APPROVED BY M.Audas	03/10/10

L-com Global Connectivity
 45 BEECHWOOD DRIVE
 NORTH ANDOVER, MA 01845

CATEGORY: **CONNECTOR**

PRODUCT DESCRIPTION: **QMA Right Angle Crimp FOR RG58 /195 Series**

PROJECTION	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. AQP-1700	REV. B
		SCALE: NONE	CAD FILE: AQP-1700.SLDDRW	SHEET 1 OF 1	

RoHS Compliant