

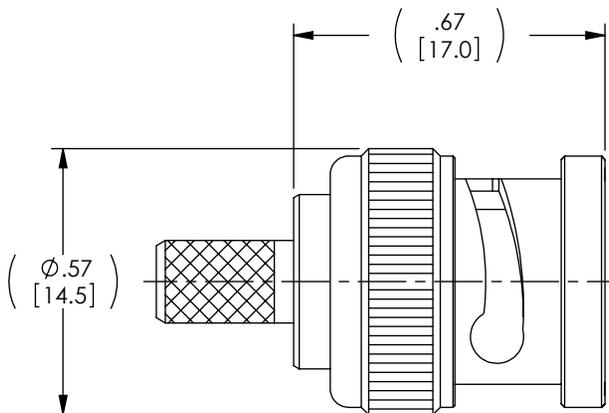



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	9/9/03	-
B	ECN 4566: REDRAW ONTO NEW FORMAT	2/26/10	D. CASTRO


DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL
INSULATOR	DELRIN	-
CENTER PIN	BRASS	GOLD
FERRULE	BRASS	NICKEL
SHELL	BRASS	NICKEL
WASHER	BRASS	NICKEL
CURVED WASHER	HIGH CARBON STEEL	NICKEL
RETAINING RING	BRASS	NICKEL
GASKET	RUBBER	-



RECOMMENDED
FERRULE
CRIMP SIZE



RECOMMENDED
PIN
CRIMP SIZE

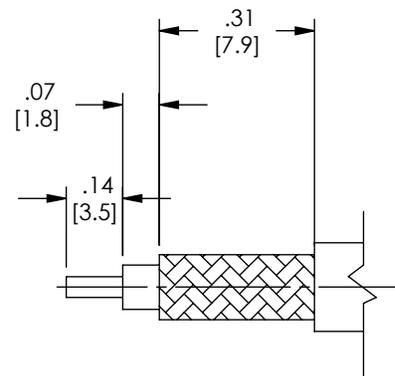

RECOMMENDED
CABLE STRIPPING

NOTES:

ELECTRICAL:

IMPEDANCE: 50 OHMS
 WITHSTAND VOLTAGE: 1500V
 FREQUENCY RANGE: 0 ~ 4 GHz
 VSWR ≤ 1.30 @ 0 ~ 4 GHz
 DURABILITY: ≥ 500 CYCLE
 CABLE RETENTION: >30 lbs.

MISCELLANEOUS:

COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PS-0031

ALL DIMENSIONS ARE FOR REF ONLY.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	APPROVALS DRAWN BY A. VAJANYI	DATE 9/9/03	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CHECKED BY A. VAJANYI	DATE 9/9/03	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION CON,RP-BNC PLUG CRIMP LMR195	SIZE A
COLOR VARIATIONS MAY OCCUR	FSCM NO. 43321	DWG. NO. ARBP-1700	REV. B
SCALE: NONE		CAD FILE: ARBP-1700.SLDDRW	
			SHEET 1 OF 1