


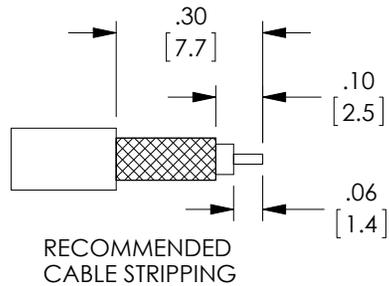
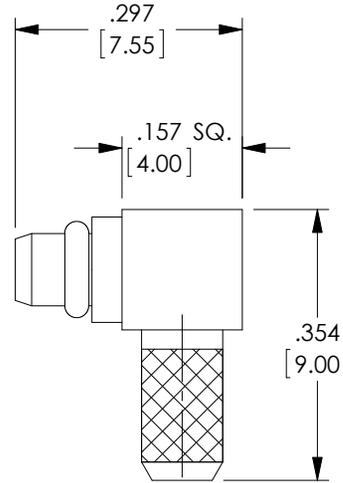


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	8/3/09	M.AUDAS
B	HL-4161: NEW DESIGN, DESCRIPTION CHANGE	8/3/09	M.AUDAS
C	ECN 6294: REDRAWN PER UPDATED VENDOR SPEC.	7/23/12	D.FRISIELLO

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	GOLD PLATE
CENTER CONTACT	BERYLLIUM	GOLD PLATE
FERRULE	BRASS	GOLD PLATE
INSULATOR	PTFE	--
CAP INSULATOR	PTFE	--
CAP INSERT	BRASS	GOLD PLATE
RETAINING RING	BERYLLIUM	GOLD PLATE



NOTES:

RECOMMENDED APPLICATIONS: LMR100, RG174, RG188, & RG316.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	APPROVALS DRAWN BY D.FRISIELLO CHECKED BY T.VADEN APPROVED BY K.BURGNER	DATE 7/23/12 7/23/12 7/23/12	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321 DWG. NO. ARMMP-1100 REV. C
SCALE: NONE		CAD FILE: ARMMP-1100.SLDDRW	SHEET 1 OF 1