
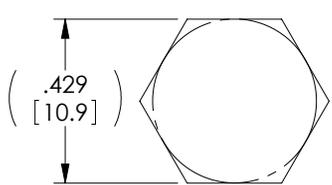



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	6/15/11	D.GRIFFIN


DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL
RETAINING RING	BRASS	NICKEL
PIN	BRASS	GOLD
DIELECTRIC	TEFLON	---
GASKET	RUBBER	---
GROUND RING	BRASS	NICKEL
SHELL	BRASS	NICKEL
FERRULE	BRASS	NICKEL

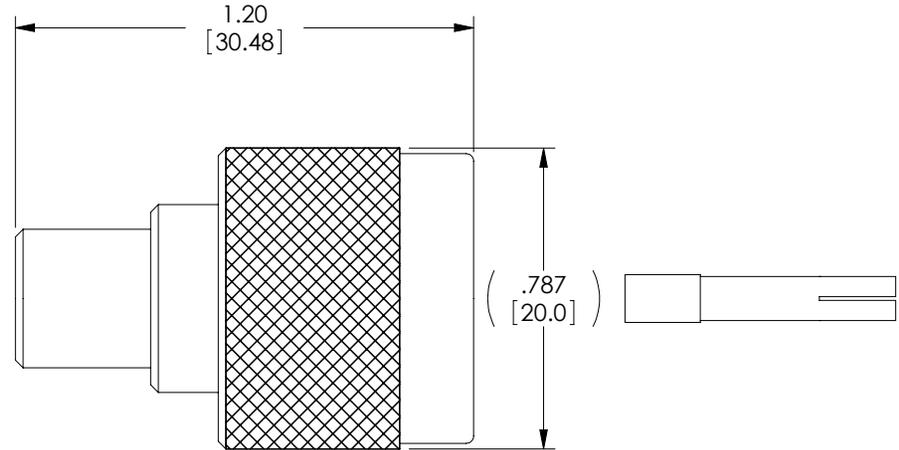

**RECOMMENDED
FERRULE
CRIMP SIZE**



**RECOMMENDED
PIN
CRIMP SIZE**

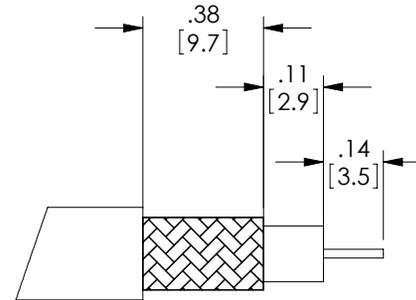

**RECOMMENDED
CABLE STRIPPING**

NOTES:

ELECTRICAL:

IMPEDANCE: 50 OHMS
 WITHSTAND VOLTAGE: 2500V
 FREQUENCY RANGE: 0~6 GHz
 VSWR: <1.50 @ 0~6 GHz
 DURABILITY: > 500 CYCLE
 CABLE RETENTION: > 40 POUNDS

MISCELLANEOUS:

COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	APPROVALS DRAWN BY D. CASTRO CHECKED BY K. BURGNER APPROVED BY K. BURGNER	DATE 6/14/11 6/14/11 6/14/11		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845			
	CATEGORY COAXIAL			PRODUCT DESCRIPTION CON,RP-N PLUG CRIMP LMR400			
	PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR		SIZE A	FSCM NO. 43321	DWG. NO. ARNP-1404
	1AB04-045			SCALE: NONE	CAD FILE: ARNP-1404.SLDDRW	SHEET 1 OF 1	