




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	ECN: 5062: REDRAWN TO NEW SUPPLIER SPECS	10/5/10	D. CASTRO

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL
CONTACT	BRASS	GOLD
INSULATOR	PTFE	---
FERRULE	BRASS	NICKEL
GASKET	RUBBER	---
RETAINING RING	BRASS	NICKEL
SHELL	BRASS	NICKEL

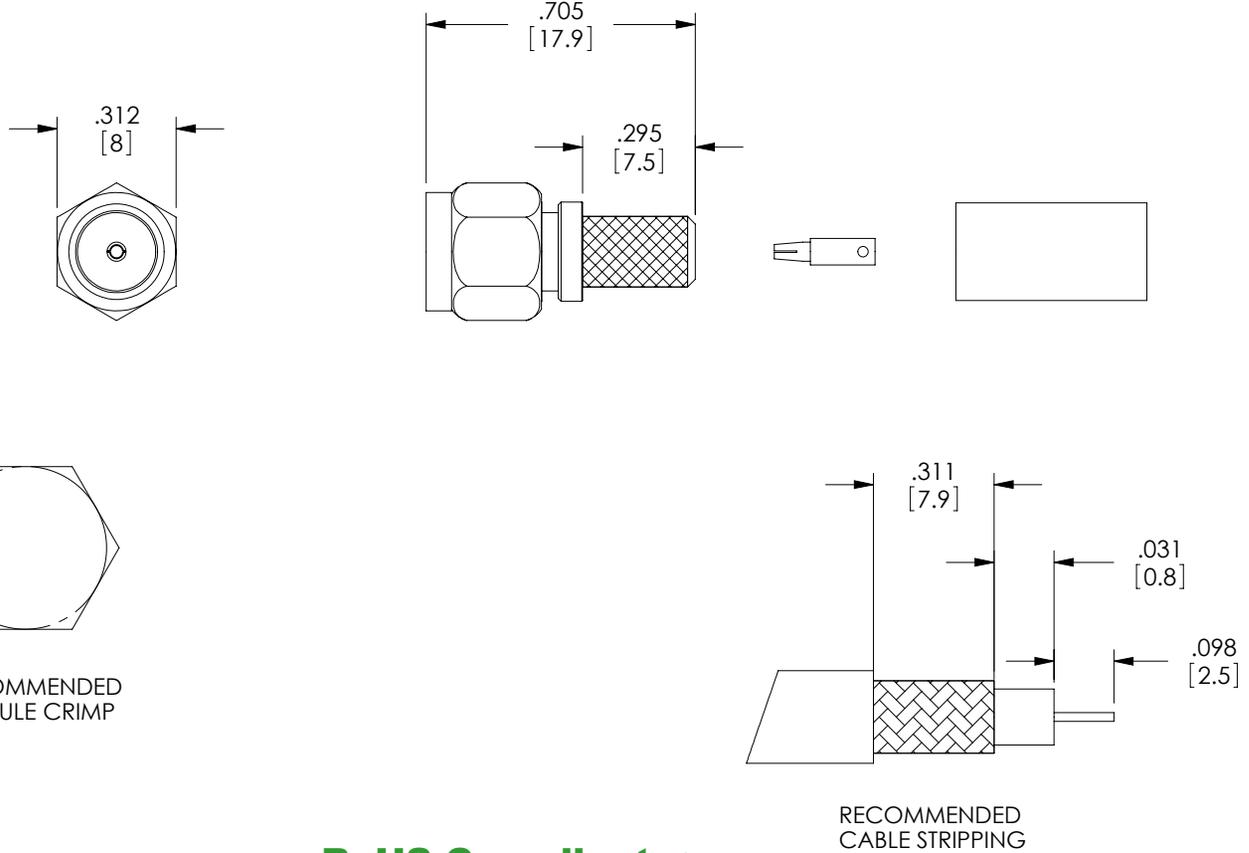

RECOMMENDED CABLE STRIPPING

NOTES:
ELECTRICAL:
 IMPEDANCE: 50 OHMS
 WITHSTAND VOLTAGE: 2500V
 FREQUENCY RANGE: 0~6 GHz
 VSWR: <1.50 @ 0~6 GHz
 DURABILITY: > 500 CYCLE
 CABLE RETENTION: > 40 POUNDS

MISCELLANEOUS:
 COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.
 ALL DIMENSIONS ARE FOR REFERENCE ONLY.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY A. VAJANYI	6/24/03		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY A. VAJANYI	6/24/03	CATEGORY COAXIAL	
	APPROVED BY P. PESA	6/24/03	PRODUCT DESCRIPTION CON,RP-SMA PLUG CRIMP LMR200	
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. ARSP-1202
1A801-044		SCALE: NONE	CAD FILE: ARSP-1202.SLDDRW	SHEET 1 OF 1