
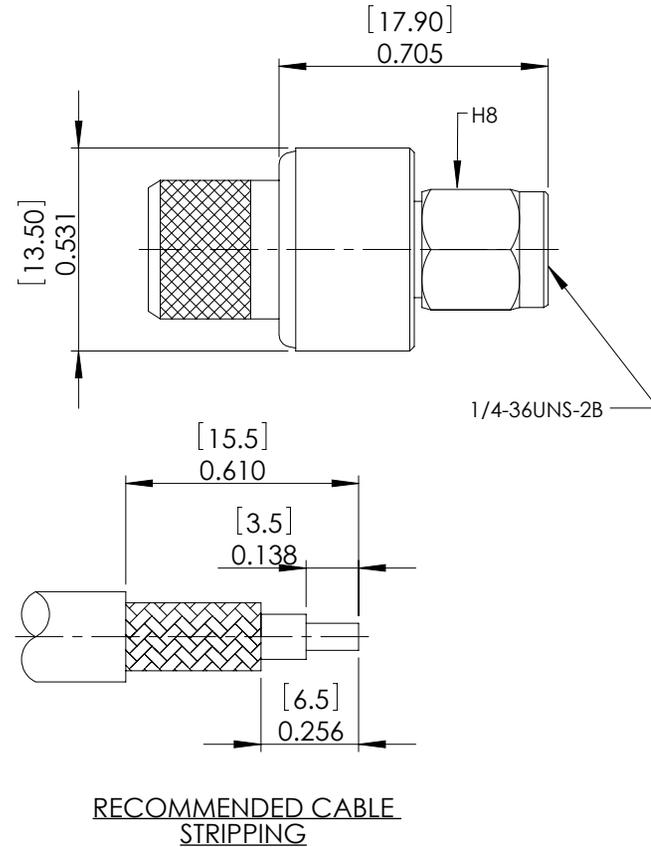


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/24/03	A. Vajany
B	UPDATED FORMAT AND CONNECTOR INFO ECN#4368	11/11/09	B. Puchaski
C	ECN 8502: UPDATE GASKET MATERIAL FROM RUBBER TO SILICON	10/12/16	S.LI

DESCRIPTION	MATERIAL	FINISH
CENTER CONTACTS	BRASS	GOLD
OUTER CONTACT	BRASS	NICKEL
BODY	BRASS	NICKEL
CRIMP FERRULE	BRASS	NICKEL
GASKET	SILICON 	---
INSULATOR	TEFLON	---
RETAINING RING	BRASS	NICKEL

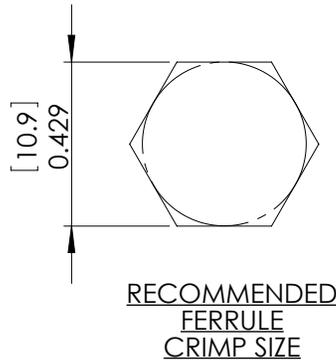


**NOTES:**

**ELECTRICAL:**  
 IMPEDENCE: 50 OHMS  
 WITHSTAND VOLTAGE: 1000V  
 FREQUENCY RANGE: 0~6 GHz  
 VSWR: ≤1.50 @ 0~6 GHz  
 DURABILITY: ≥ 500 CYCLE  
 CABLE RETENTION: > 40 POUNDS

**MISCELLANEOUS:**  
 COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

**REGULATORY COMPLIANCE:**  
 CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	 50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY B. Puchaski	11/11/09	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ± .005 [1.3]	CHECKED BY M. Audas	11/11/09	CATEGORY  <b>CONNECTOR</b>
	APPROVED BY M. Audas	11/11/09	
PROJECTION	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION RP-SMA STRAIGHT PLUG CRIMP FOR RG8/LMR400	
	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>
		DWG. NO. ARSP-1404	REV. <b>C</b>
		SCALE: NONE	CAD FILE: ARSP-1404.SLDDRW
			SHEET 1 OF 1