
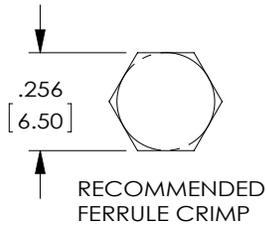
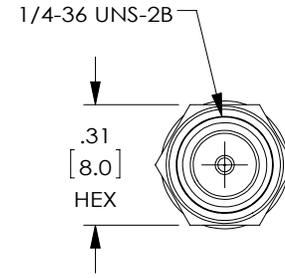
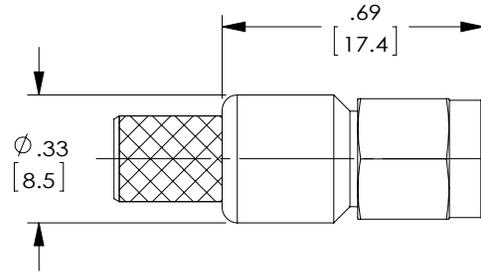




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	ECN# 4298: UPDATED BODY AND STRIPPING DIMS	8/8/12	D.FRISIELLO
C	ECN 6496: REVISED PIN CRIMP TO .075. ADDED SOLDER NOTE	10/31/12	D.FRISIELLO
D	ECN 8518: UPDATE MATERIAL AND STRIPPED DIMS	10/20/16	S.LI


DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL
CENTER PIN	PHOSPHOR BRONZE $\Delta$ /D	GOLD
INSULATOR	PTFE	--
GASKET	MVQ $\Delta$ /D	--
RETAINING RING	PHOSPHOR BRONZE $\Delta$ /D	--
FERRULE	BRASS	NICKEL



RECOMMENDED FERRULE CRIMP



RECOMMENDED PIN CRIMP

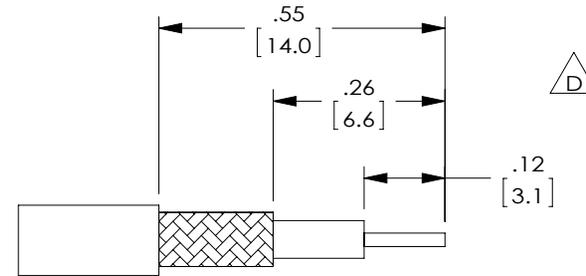

RECOMMENDED CABLE STRIPPING

**NOTES:**

**ELECTRICAL:**

IMPEDANCE: 50 OHMS  
 WITHSTAND VOLTAGE: 1000V  
 FREQUENCY RANGE: 0~6 GHz  
 VSWR: <1.50 @ 0~6 GHz  
 DURABILITY: > 500 CYCLE  
 CABLE RETENTION: > 40 POUNDS

**MISCELLANEOUS:**

CENTER PIN CAN ALSO BE SOLDERED.

COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.3]	APPROVALS DRAWN BY D.FRISIELLO	DATE 8/8/12	50 HIGH STREET NORTH ANDOVER, MA 01845		
	CHECKED BY K.BURGNER	8/8/12		CATEGORY COAXIAL	
	APPROVED BY P.PESA	8/8/12	PRODUCT DESCRIPTION CON,SMA MALE CRIMP LMR240		
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. ASM-1504
		SCALE: NONE	CAD FILE: ASM-1504.SLDDRW	SHEET 1 OF 1	