




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	RELEASED FOR PRODUCTION	11/01/01	MCCORMICK
B	ECN 3112: UPDATE DWG FORMAT	12/13/07	D.GRIFFIN



2X BNC JACK

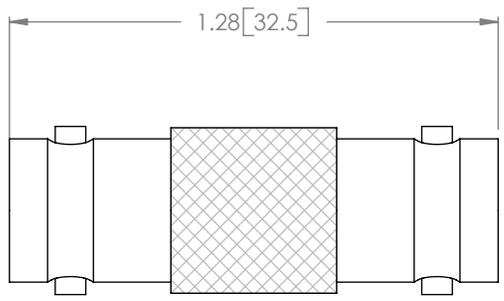


NOTES:

**MATERIAL:**  
 CONNECTOR BODY IS NICKEL PLATED BRASS  
 CENTER CONTACTS ARE GOLD PLATED.  
 INSULATION IS DELRIN

IMPEDANCE: 75 OHM

**RoHS Compliant** ✓

UNLESS OTHERWISE SPECIFIED,  
 DIMENSIONS ARE IN INCHES [mm]  
 TOLERANCES TO BE:  
 .X ±.1 [2.5] ANGLES ±2°  
 .XX ±.01 [.25]  
 .XXX ±.005 [.13]  
 OVERALL CABLE LENGTH TOL:  
 ≤ 60 [1524] +3 [76.2] / -0  
 > 60 [1524] +5% / -0%



APPROVALS	DATE
DRAWN BY MCCORMICK	11/01/01
CHECKED BY ENG	11/01/01
APPROVED BY D.PARHAM	11/01/01

CONFIGURATION DETAILS OF  
 UNDIMENSIONED FEATURES  
 MAY VARY

**L-com** 45 BEECHWOOD DRIVE  
 CONNECTIVITY PRODUCTS NORTH ANDOVER, MA  
 01845

CATEGORY  
**COAXIAL**

PRODUCT DESCRIPTION  
**ADAPTOR 75 OHM BNC F/BNC F**

SIZE	FSCM NO.	DWG. NO.	REV.
<b>A</b>	<b>43321</b>	<b>BA016</b>	<b>B</b>

SCALE: NONE | CAD FILE: BA016.SLDDRW | SHEET 1 OF 1