
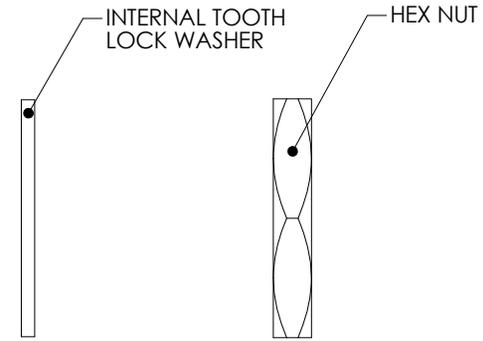


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED TO PRODUCTION	05/03/02	MCCORMICK
B	ECN 3112: UPDATE DWG FORMAT	12/14/07	D.GRIFFIN
C	ECN 7450: ADDED MATERIAL CHART, REVISED ALL NOTES, FORMAT, ROHS	5/21/14	D.FRISIELLO
D	ECN 7469: CHANGE WASHER MATERIAL FROM BRASS TO STEEL	6/4/14	D.FRISIELLO

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL PLATE
INSULATOR	ACTEAL	WHITE
CENTER PIN	BRASS	GOLD PLATE
WASHER	STEEL	NICKEL PLATE
NUT	BRASS	NICKEL PLATE

△ D

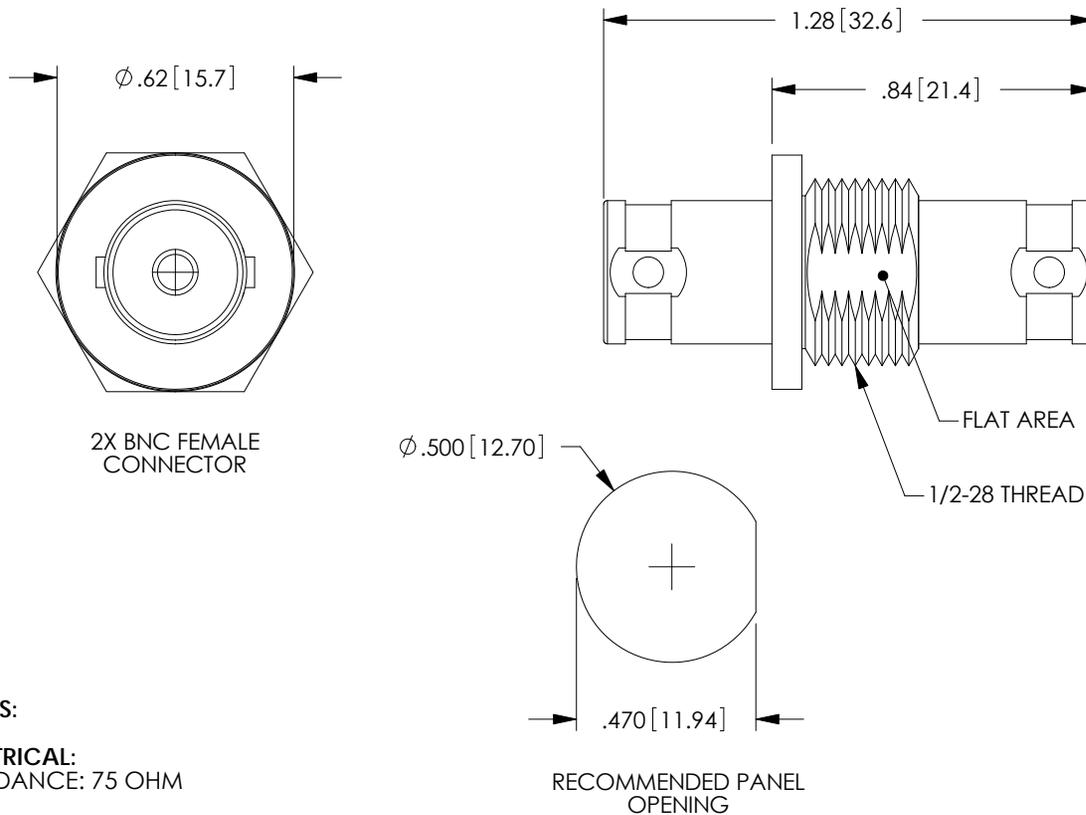

NOTES:

ELECTRICAL:
IMPEDANCE: 75 OHM

MISCELLANEOUS:

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

ACETAL MOUNTING FLANGE AND THREADED BARREL PROVIDE INSULATION FROM PANEL.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ±.005 [1.27]	APPROVALS DRAWN BY MCCORMICK CHECKED BY D.PARHAM APPROVED BY R.CARRICK	DATE 05/02/02 05/02/02 05/02/02	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
1A805-106		DWG. NO. BA039	PRODUCT DESCRIPTION BNC INSULATED BULKHEAD ADAPTOR
SCALE: NONE		CAD FILE: BA039.SLDDRW	REV. D
SHEET 1 OF 1			