




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	RELEASED FOR PRODUCTION	03/28/02	MCCORMICK
B	ECN 3112: UPDATE DWG FORMAT	12/14/07	D.GRIFFIN



2X BNC PLUG

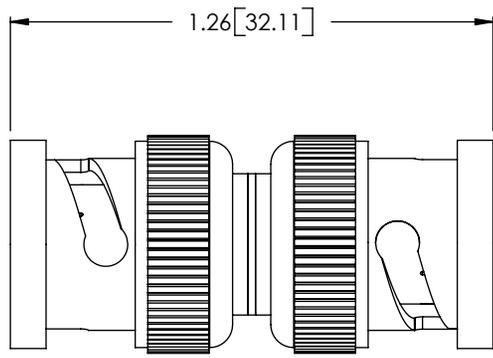


NOTES:

- BODY: BRASS NICKEL PLATE
- CENTER PIN: BRASS GOLD PLATE
- SPRING: STEEL NICKEL
- WASHER: STEEL NICKEL
- C TYPE WASHER: STEEL NICKEL
- GASKET: PVC
- INSULATOR: DERLIN
- BNC SHELL: BRASS NICKEL

IMPEDANCE: 50 OHMS
 FREQUENCY: 0-4 GHz
 VOLTAGE: 500 VOLTS PEAK
 VSWR: 1.3 MAX

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED,
 DIMENSIONS ARE IN INCHES [mm]
 TOLERANCES TO BE:
 .X ±.1 [2.5] ANGLES ±2°
 .XX ±.01 [.25]
 .XXX ±.005 [.13]
 OVERALL CABLE LENGTH TOL:
 ≤ 60 [1524] +3 [76.2] / -0
 > 60 [1524] +5% / -0%



APPROVALS	DATE
DRAWN BY MCCORMICK	03/28/02
CHECKED BY D.PARHAM	03/28/02
APPROVED BY R.CARRICK	03/28/02

CONFIGURATION DETAILS OF
 UNDIMENSIONED FEATURES
 MAY VARY

L-com 45 BEECHWOOD DRIVE
 CONNECTIVITY PRODUCTS NORTH ANDOVER, MA
 01845

CATEGORY: COAXIAL

PRODUCT DESCRIPTION: ADAPTOR BNC M/BNC M

SIZE A	FSCM NO. 43321	DWG. NO. BA100	REV. B
------------------	--------------------------	--------------------------	------------------