


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED FOR PRODUCTION	05/10/01	MCCORMICK
B	REVISED TOLERANCES PER ECN 1489	08/08/03	MCCORMICK
C	ECN 3112: UPDATE DWG FORMAT	12/13/07	D.GRIFFIN
D	ECN 4179: ADDED VOLTAGE RATING, CN RELEASE, NEW FORMAT	8/12/09	D.FRISIELLO

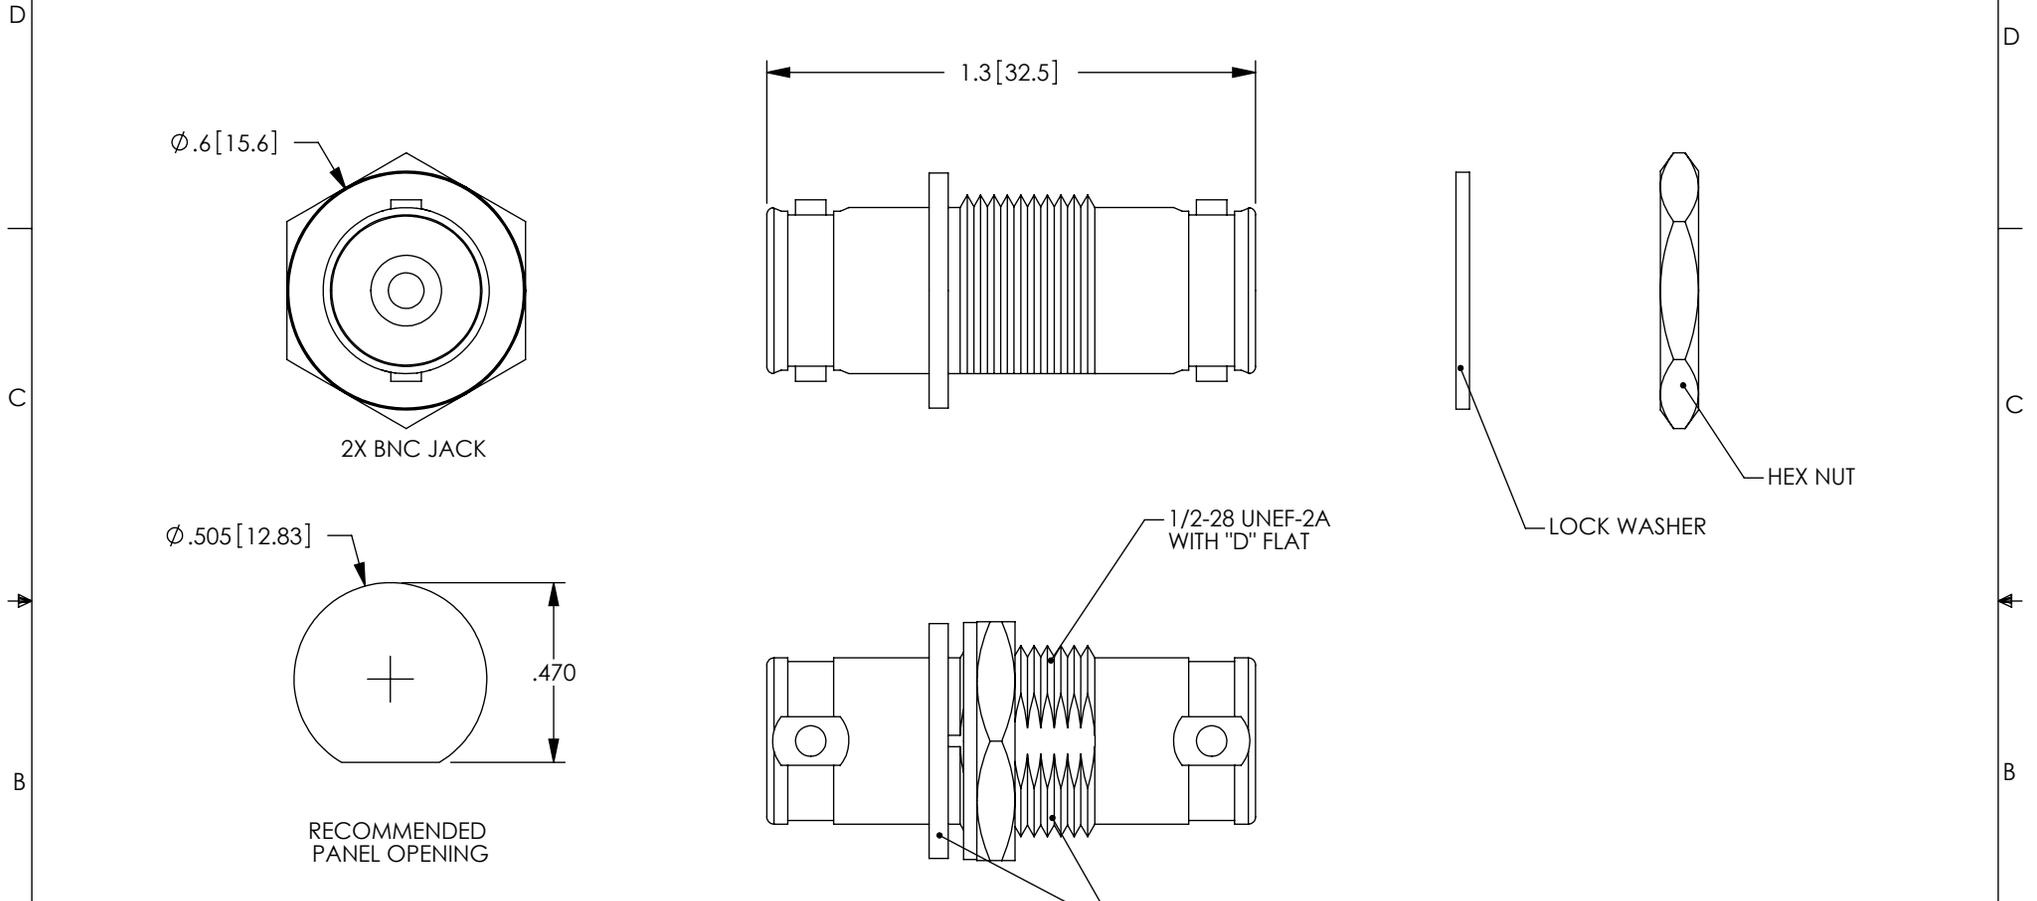

SPECIFICATIONS;

MATERIALS:
 SHELL: BRASS
 CONTACTS: BRASS
 INSULATOR: TEFLON

FINISH:
 CONTACT: GOLD

ELECTRICAL:
 CHARACTERISTIC IMPEDANCE: 50 OHMS
 VOLTAGE RATING: 36V

PACKAGING:
 COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY RON CARRICK	4/3/2001		
DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.01 .XXX = ±.005	CHECKED BY MCCORMICK	05/10/01	CATEGORY COAXIAL	
	APPROVED BY D.PARHAM	05/10/01	PRODUCT DESCRIPTION BNC JACK FEED-THRU ADAPTOR (INSULATED)	
ANGULAR TOLERANCES: ALL = ± 1°	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321
PROJECTION 	COLOR VARIATIONS MAY OCCUR	DWG. NO. BA1089	REF	REV. D
		SCALE: NONE	CAD FILE: BA1089.SLDDRW	SHEET 1 OF 1