
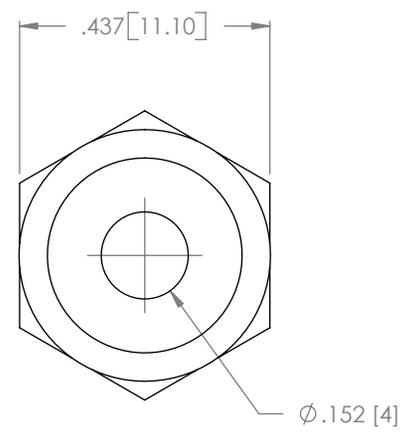


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	APPROVED FOR PRODUCTION	03/17/03	MCCORMICK
B	ECN 3135: UPDATE DWG FORMAT	12/31/07	D.GRIFFIN

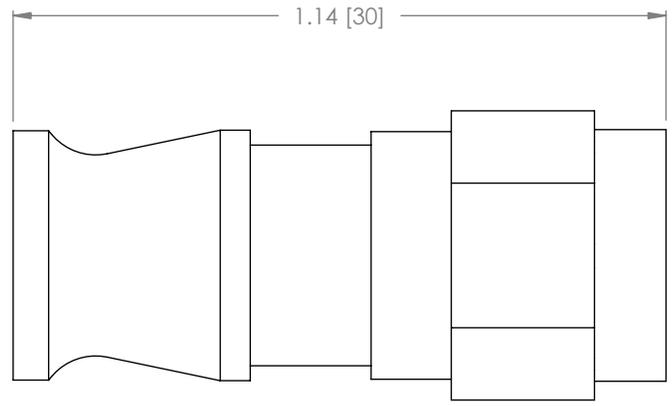

NOTES:

BRAID SHIELD: FROM 60% TO QUAD
 RECOMMENDED APPLICATION: RG59 COAXIAL CABLE
 O-RING BETWEEN CONNECTOR AND BODY PLUS SILICONE
 FINISH: CLEAR CHROMATE

UNLESS OTHERWISE SPECIFIED,
 DIMENSIONS ARE IN INCHES [mm]
 TOLERANCES TO BE:
 .X ±.1 [2.5] ANGLES ±2°
 .XX ±.01 [.25]
 .XXX ±.005 [.13]
 OVERALL CABLE LENGTH TOL:
 ≤ 60 [1524] +3 [76.2] / -0
 > 60 [1524] +5% / -0%



APPROVALS	DATE
DRAWN BY C.MCCORMICK	03/17/2003
CHECKED BY D.PARHAM	03/17/2003
APPROVED BY R.CARRICK	03/17/2003

CONFIGURATION DETAILS OF
 UNDIMENSIONED FEATURES
 MAY VARY

L-com CONNECTIVITY PRODUCTS		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
CATEGORY		COAXIAL	
PRODUCT DESCRIPTION		"F" INDOOR/OUTDOOR RG59 CONNECTOR	
SIZE A	FSCM NO. 43321	DWG. NO. BAC-EX59	REV. B
SCALE: NONE		CAD FILE: BAC-EX59.SLDDRW	SHEET 1 OF 1