
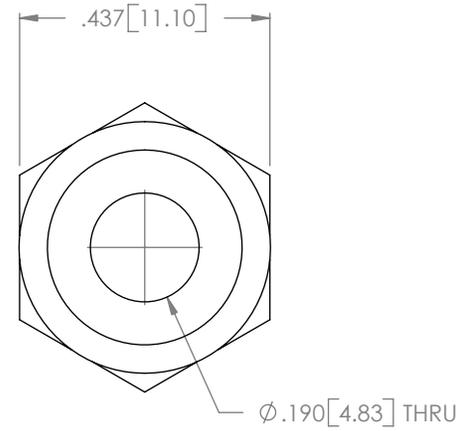



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	APPROVED FOR PRODUCTION	03/17/03	MCCORMICK
B	ECN 3135: UPDATE DWG FORMAT	12/31/07	D.GRIFFIN

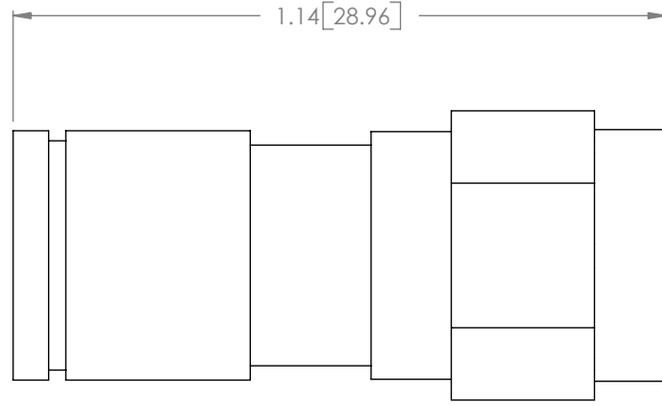

NOTES:  
 BRAID SHIELD: FROM 60% TO QUAD  
 RECOMMENDED APPLICATION: RG6 COAXIAL CABLE  
 O-RING BETWEEN CONNECTOR AND BODY PLUS SILICONE  
 FINISH: CLEAR CHROMATE

UNLESS OTHERWISE SPECIFIED,  
 DIMENSIONS ARE IN INCHES [mm]  
 TOLERANCES TO BE:  
 .X ±.1 [2.5] ANGLES ±2°  
 .XX ±.01 [.25]  
 .XXX ±.005 [.13]  
 OVERALL CABLE LENGTH TOL:  
 ≤ 60 [1524] +3 [76.2] / -0  
 > 60 [1524] +5% / -0%



APPROVALS	DATE
DRAWN BY C.MCCORMICK	03/17/2003
CHECKED BY D.PARHAM	03/17/2003
APPROVED BY R.CARRICK	03/17/2003

CONFIGURATION DETAILS OF  
 UNDIMENSIONED FEATURES  
 MAY VARY

<b>L-com</b> CONNECTIVITY PRODUCTS		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
CATEGORY COAXIAL			
PRODUCT DESCRIPTION CONNECTOR F M RG6 COMPRESSION			
SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. BAC-EX6	REV. <b>B</b>
SCALE: NONE		CAD FILE: BAC-EX6.SLDDRW	SHEET 1 OF 1