

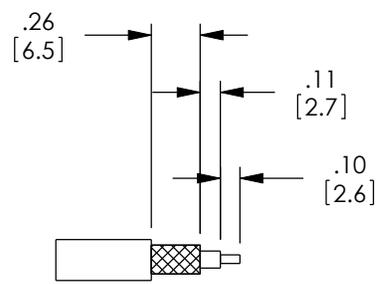
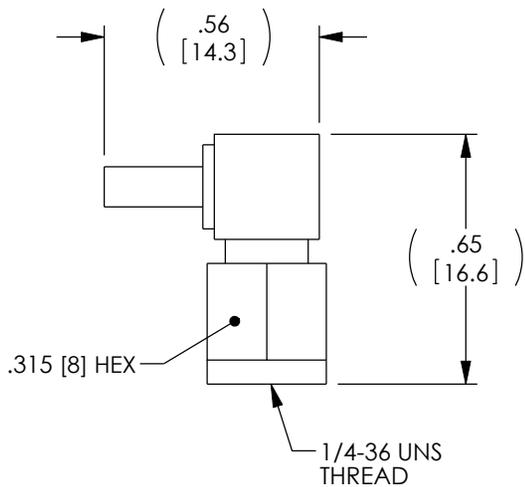


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 4492: REVISED DRAWING, NOTES, CHART, NEW FORMAT	1/13/10	D.FRISIELLO

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	GOLD PLATE
SHELL	BRASS	GOLD PLATE
INSULATOR	PTFE	-
PIN	BRASS	30μ IN GOLD PLATE
FERRULE	BRASS	GOLD PLATE
INSULATOR, CAP	PTFE	-
CAP	BRASS	GOLD PLATE
SHRINK TUBE	PE	-



RECOMMENDED
CABLE STRIPPING
DIMENSIONS

RECOMMENDED FERRULE
CRIMP SIZE
*CENTER PIN: SOLDER

RoHS Compliant ✓

- NOTES:
- INDIVIDUALLY PACKAGE EACH ASSEMBLY UTILIZING APPROPRIATE SIZED BAG.
 - APPLICATION: RG316, RG188, AND RG174 CABLE ASSEMBLIES.
 - IMPEDANCE: 50 OHMS

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.01 .XXX = ±.005 ANGULAR TOLERANCES: ALL = ± 1°	APPROVALS	DATE			45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY MCCORMICK	12/19/2001			CATEGORY COAXIAL	
	CHECKED BY D.PARHAM	12/19/2001	PRODUCT DESCRIPTION RIGHT ANGLE SMA CRIMP PLUG			
	APPROVED BY R.CARRICK	12/19/2001	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SIZE A	FSCM NO. 43321	DWG. NO. BAC02A-G
PROJECTION 	COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: BAC02A-G.SLDDRW		SHEET 1 OF 1