


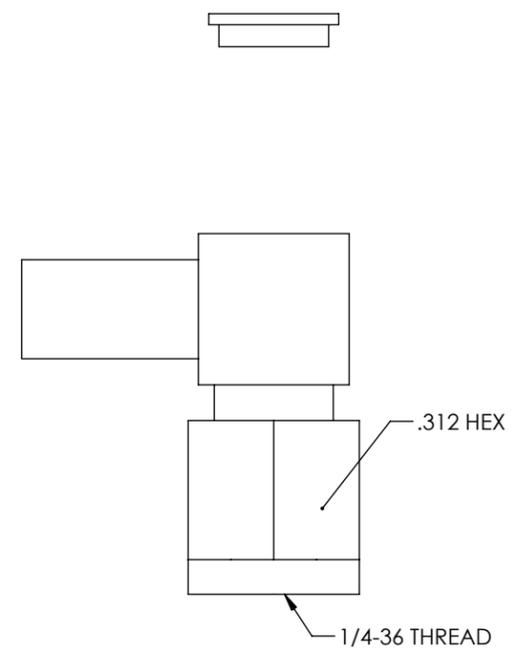


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
E	ECN 3175: UPDATE DIMS FOR CABLE STRIPPING	1/28/08	D.GRIFFIN

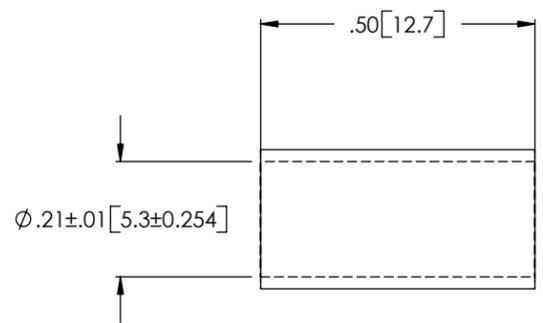

RECOMMENDED FERRULE CRIMP SIZE  
\*CENTER PIN: SOLDER

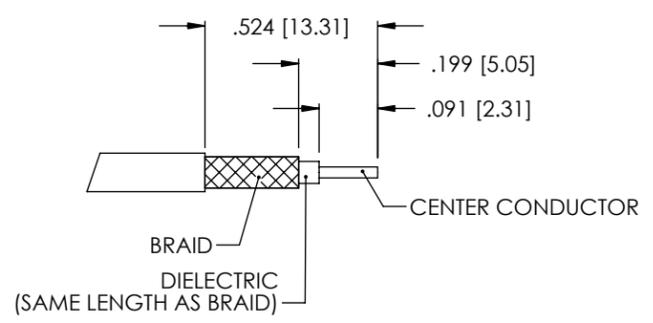

RECOMMENDED CABLE STRIPPING DIMENSIONS

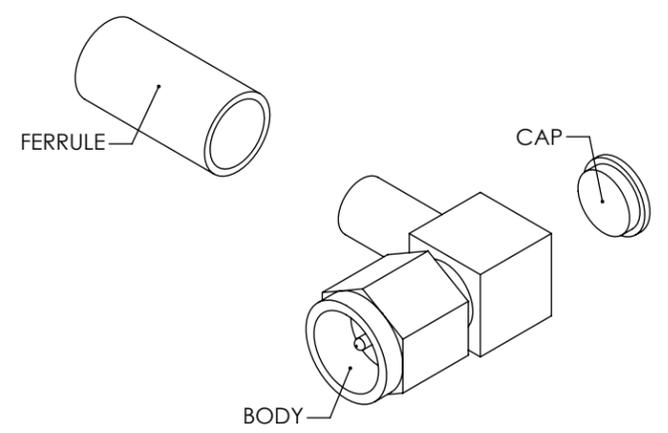

NOTES:

**MATERIAL:**  
BODY: BRASS  
FERRULE: BRASS OR COPPER ALLOY  
PIN: BRASS  
INSULATOR: PTFE

**FINISH:**  
BODY: NICKEL PLATE  
FERRULE: NICKEL PLATE  
PIN: GOLD PLATE

**ELECTRICAL:**  
IMPEDANCE: 50 OHM  
EACH CABLE ASSEMBLY SHALL BE SUBJECTED TO AND PASS A CONTINUITY TEST.

**PACKAGING:**  
INDIVIDUALLY PACKAGE EACH ASSEMBLY UTILIZING APPROPRIATE SIZED BAG

**APPLICATION:**  
RG58 CABLE ASSEMBLIES

**RoHS Compliant** ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]  
TOLERANCES TO BE:  
.X ±.1 [2.5] ANGLES ±2°  
.XX ±.01 [.25]  
.XXX ±.005 [.13]  
OVERALL CABLE LENGTH TOL:  
≤ 60 [1524] +3 [76.2] / -0  
> 60 [1524] +5% / -0%

APPROVALS	DATE
DRAWN BY C.MCCORMICK	12/19/2001
CHECKED BY D.PARHAM	12/19/2001
APPROVED BY R.CARRICK	12/19/2001



SIZE	FSCM NO.	DWG. NO.	REV.
<b>B</b>	<b>43321</b>	<b>BAC02</b>	<b>E</b>

**L-com** 45 BEECHWOOD DRIVE  
CONNECTIVITY PRODUCTS NORTH ANDOVER, MA 01845

CATEGORY	
PRODUCT DESCRIPTION <b>SMA RIGHT ANGLE CRIMP PLUG</b>	
SCALE: 1:1	CAD FILE: BAC02.SLDDRW
SHEET 1 OF 1	