

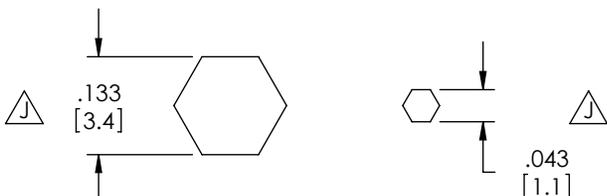


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
H	ECN 3150: UPDATE DWG FORMAT	1/10/08	D.GRIFFIN
J	ECN 4923: UPDATED DIMS. TO NEW SUPPLIER DRAWING	7/22/10	D. CASTRO

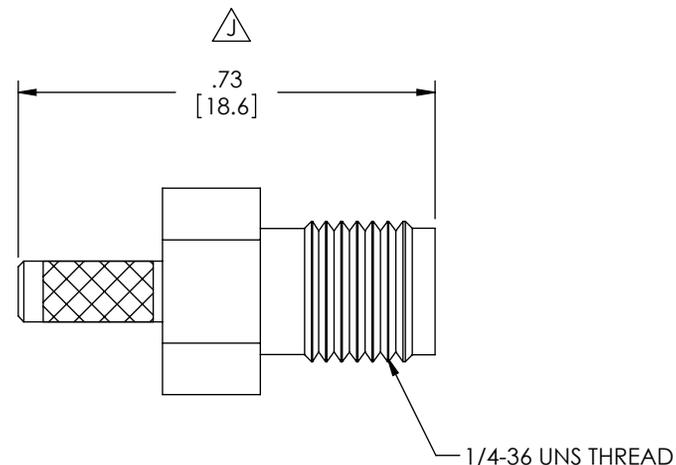

RECOMMENDED
FERRULE & PIN
CRIMP SIZES

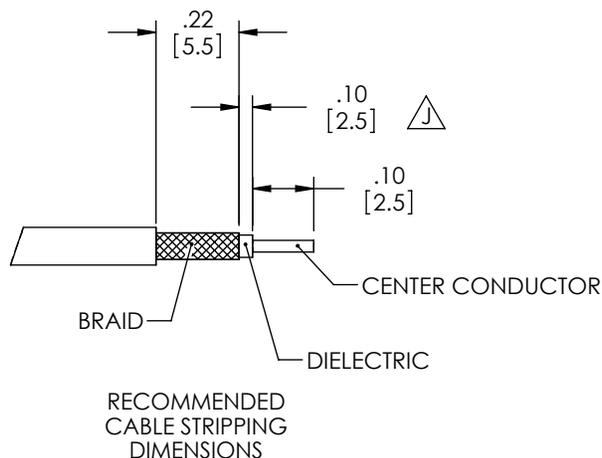

NOTES:

MATERIAL:

BODY, FERRULE: BRASS
PIN: PHOSPHOR BRONZE
INSULATION: PTFE

FINISH:

BODY AND FERRULE: NICKEL PLATE
PIN: GOLD PLATE

ELECTRICAL:

CHARACTERISTIC IMPEDANCE: 50 OHMS

MISCELLANEOUS:

FOR TERMINATION OR TOOLING INFORMATION PLEASE VISIT THE APPROPRIATE PRODUCT PAGE AT WWW.L-COM.COM. CONNECTOR TO BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPEC PS-0031.

APPLICATION:

RG174 CABLE ASSEMBLIES

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	L-com Global Connectivity 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D.PARHAM	03/25/2002	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ±.005	CHECKED BY T.CLARK	03/25/2002	CATEGORY COAXIAL
	APPROVED BY C.MCCORMICK	03/25/2002	PRODUCT DESCRIPTION STRAIGHT SMA JACK CRIMP NICKEL
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A FSCM NO. 43321 DWG. NO. BAC05A REV. J
SCALE: NONE		CAD FILE: BAC05A.SLDDRW	SHEET 1 OF 1