



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 3150: UPDATE DWG FORMAT	1/10/08	D.GRIFFIN
F	ECN 9220: REVISED 3D MODEL TO NEW VENDOR SPEC	5/29/18	D.FRISIELLO

DESCRIPTION	MATERIAL	FINISH
SHELL	BRASS	NICKEL PLATE
BODY	BRASS	NICKEL PLATE
INSULATOR	ACETAL	-
CONTACT PIN	BRASS	GOLD PLATE
BRAIDED CLAMP	BRASS	NICKEL PLATE
O-RING	RUBBER	RED
FLAT WASHER	STEEL	NICKEL PLATE
CLAMP NUT	ZINC ALLOY	NICKEL PLATE

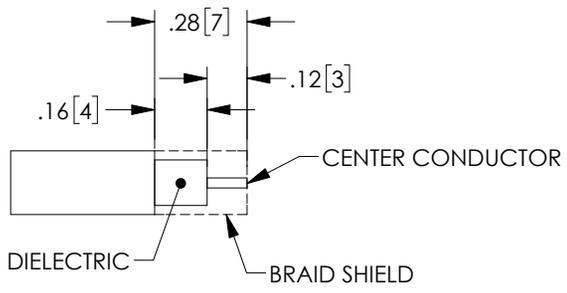

RECOMMENDED CABLE STRIPPING DIMENSIONS

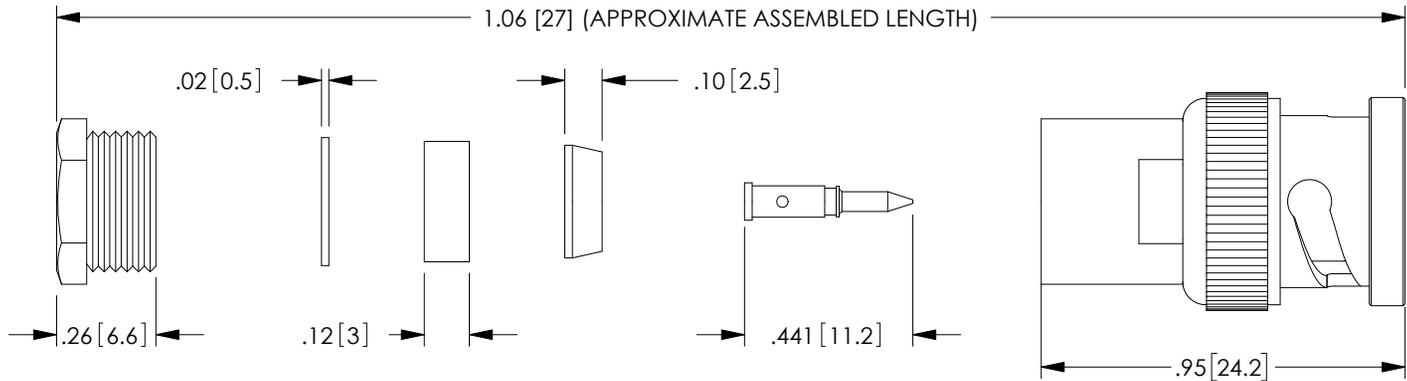

NOTES:

ELECTRICAL:
 IMPEDANCE: 50 OHM
 FREQUENCY RANGE: 0-4 GHz
 VOLTAGE RATING: ≥ 500 V RMS
 INSULATION RESISTANCE: ≥ 5 GΩ
 DIELECTRIC WITHSTANDING VOLTAGE: 1500 V RMS
 CONTACT RESISTANCE: CENTER CONTACT: ≤ 1.5 MΩ
 OUTER CONTACT: ≤ 1 MΩ

APPLICATION:
 RG58, LMR195

-- ALL DIMENSIONS ARE FOR REFERENCE ONLY --

COMPONENT ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY C.MCCORMICK	08/23/2001		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ±.005 [1.27]	CHECKED BY D.PARHAM	08/23/2001	CATEGORY COAXIAL	
	APPROVED BY R.CARRICK	08/23/2001	PRODUCT DESCRIPTION CONNECTOR BNC M RG58 CLAMP	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
			DWG. NO. BAC10A	REV. F
			SCALE: NONE	CAD FILE: BAC10A.SLDDRW
				SHEET 1 OF 1