


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
G	ECN 3150: UPDATE DWG FORMAT	1/9/08	D.GRIFFIN

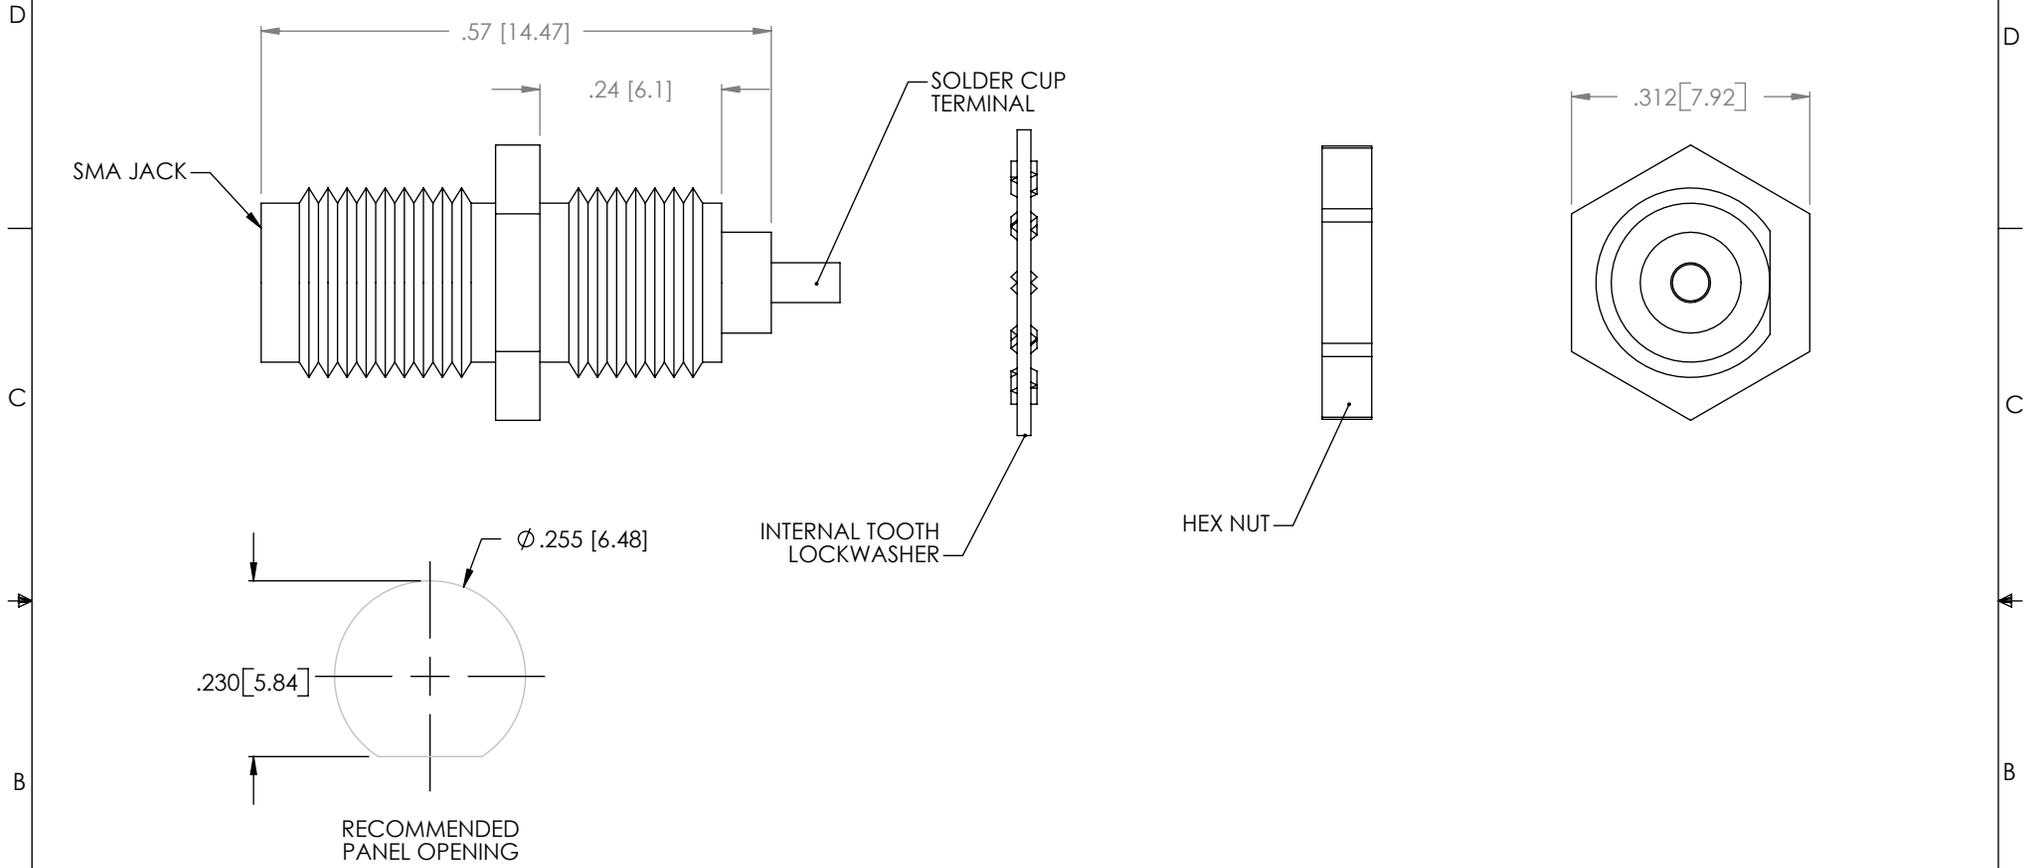

NOTES:


MATERIAL:
 BODY: BRASS
 DIELECTRIC: PTFE
 CENTER PIN: BERYLLIUM COPPER

FINISH:
 BODY: NICKEL PLATE
 CENTER PIN: 30 MICRO INCH GOLD

ELECTRICAL:
 IMPEDANCE: 50 OHMS
 FREQUENCY RANGE: 0-6 GHZ

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED,
 DIMENSIONS ARE IN INCHES [mm]
 TOLERANCES TO BE:
 .X ±.1 [2.5] ANGLES ±2°
 .XX ±.01 [.25]
 .XXX ±.005 [.13]
 OVERALL CABLE LENGTH TOL:
 ≤ 60 [1524] +3 [76.2] / -0
 > 60 [1524] +5% / -0%



APPROVALS	DATE
DRAWN BY D.PARHAM	03/07/001
CHECKED BY T.CLARK	03/07/001
APPROVED BY R.CARRICK	03/07/001

CONFIGURATION DETAILS OF
 UNDIMENSIONED FEATURES
 MAY VARY

L-com CONNECTIVITY PRODUCTS		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
CATEGORY		COAXIAL	
PRODUCT DESCRIPTION			
RECEPTACLE SMA F SOLDER NICKEL			
SIZE A	FSCM NO. 43321	DWG. NO. BAC16	REV. G
SCALE: NONE		CAD FILE: BAC16.SLDDRW	
SHEET 1 OF 1			