
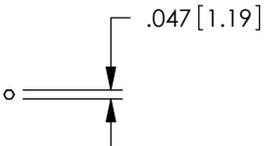
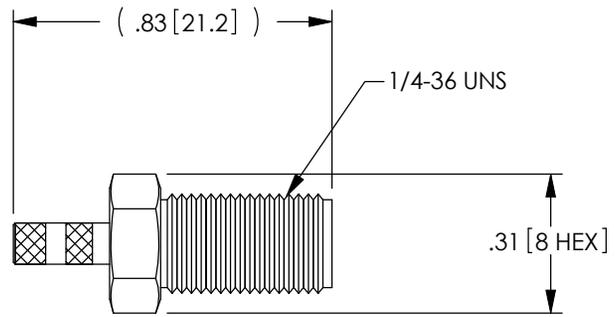



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/16/06	MCCORMICK
B	ECN 3165: UPDATE DWG FORMAT	1/21/08	D.GRIFFIN
C	ECN 4376: REVISED DRAWING PER VENDOR REQUIREMENTS	11/13/09	D.FRISIELLO
D	ECN 4381: REVISE PER PM-K.B.	11/16/09	D.FRISIELLO


DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	GOLD PLATE
FERRULE	BRASS	GOLD PLATE
CENTER PIN	BRASS	GOLD PLATE 30μ"
INSULATOR	PTFE	-



RECOMMENDED CENTER PIN CRIMP SIZE

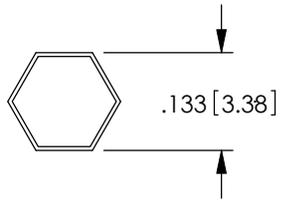

RECOMMENDED FERRULE CRIMP SIZE

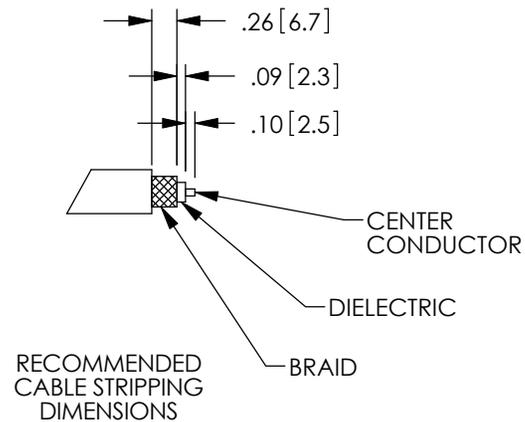

RECOMMENDED CABLE STRIPPING DIMENSIONS

NOTES:

ELECTRICAL:
IMPEDANCE: 50 OHM

PACKAGING:
COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

APPLICATION:
RECOMMENDED APPLICATION: RG174, RG188, RG316 COAXIAL CABLE.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	APPROVALS DRAWN BY C.MCCORMICK	DATE 01/16/2006	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CHECKED BY D.PARHAM	01/16/2006	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	PRODUCT DESCRIPTION REVERSE POLARITY SMA CONNECTOR
SIZE A	FSCM NO. 43321	DWG. NO. BAC512	REV. D
SCALE: NONE		CAD FILE: BAC512.SLDDRW	SHEET 1 OF 1