



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/10/06	MCCORMICK
B	ECN# 2600 REVISED FERRULE DIM AND PIN FINISH	10/23/06	MCCORMICK
C	ECN 3165: UPDATE DWG FORMAT	1/21/08	D.GRIFFIN

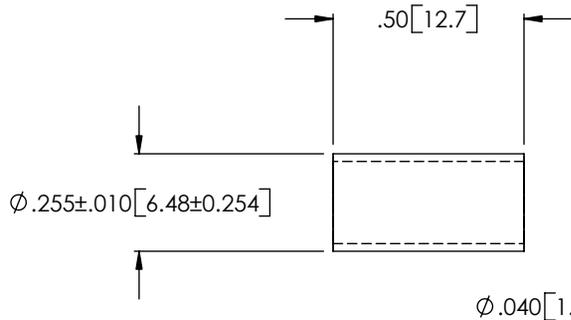

$\phi .040 [1.02]$

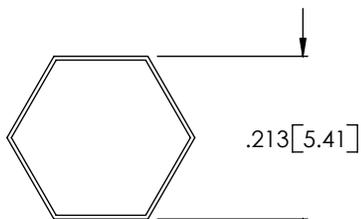

RECOMMENDED FERRULE CRIMP SIZE  
\*CENTER PIN: SOLDER

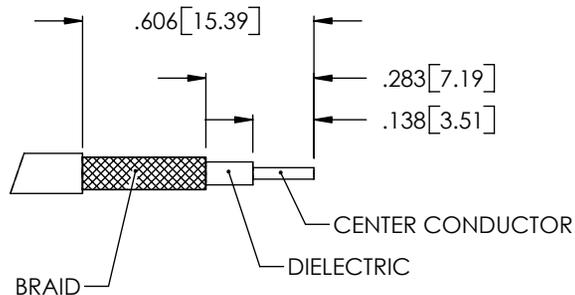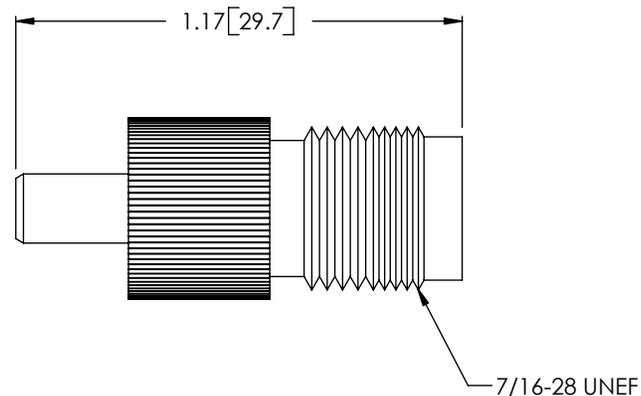

RECOMMENDED CABLE PREPARATION

**NOTES:**

**MATERIAL:**  
BODY, FERRULE, PIN: BRASS  
INSULATION: ACETAL


**FINISH:**  
BODY AND FERRULE: NICKEL PLATE  
PIN: 1-3 MICROINCH GOLD FLASH OVER BRASS PLATE

**ELECTRICAL:**  
CHARACTERISTIC IMPEDANCE: 50 OHMS

**MISCELLANEOUS:**  
FOR TERMINATION OR TOOLING INFORMATION PLEASE VISIT THE APPROPRIATE PRODUCT PAGE AT WWW.L-COM.COM.  
CONNECTOR TO BE INDIVIDUALLY PACKAGED IN A POLYBAG.

**APPLICATION:**  
RG58 CABLE ASSEMBLIES

DIMENSIONS ARE IN INCHES [mm]  
UNLESS OTHERWISE SPECIFIED,  
TOLERANCES TO BE:  
.X ± .1 [2.5] ANGLES ± 2°  
.XX ± .05 [1.3]  
.XXX ± .005 [0.13]  
OVERALL CABLE LENGTH TOL:  
≤ 60 [1524] +3 [76.2] / -0  
> 60 [1524] +5% / -0%



APPROVALS	DATE
DRAWN BY C.MCCORMICK	01/10/2006
CHECKED BY M.LAHEY	01/10/2006
APPROVED BY D.PARHAM	01/10/2006

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

<b>L-com</b> CONNECTIVITY PRODUCTS		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
CATEGORY		COAXIAL	
PRODUCT DESCRIPTION		CONN TNC F RG58 CRIMP	
SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>BAC513</b>	REV. <b>C</b>
SCALE: NONE		CAD FILE: BAC513.SLDDRW	SHEET 1 OF 1