


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 4446: REVISED DRAWING	12/18/09	D.FRISIELLO
F	ECN 7004: ADDED MATERIAL TABLE, REVISED NOTES, FORMAT, ROHS, DIMS	8/9/13	D.FRISIELLO


DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL PLATE
INSULATOR	DELRIN	--
PIN	BRASS	GOLD PLATE
FERRULE	BRASS	NICKEL PLATE
O-RING	PVC	RED
WASHER	STEEL	NICKEL PLATE
NUT	BRASS	NICKEL PLATE




FERRULE




CONTACT

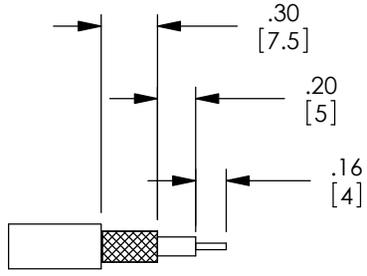


RECOMMENDED CABLE STRIPPING



RECOMMENDED FERRULE CRIMP SIZE




RECOMMENDED CONTACT CRIMP SIZE

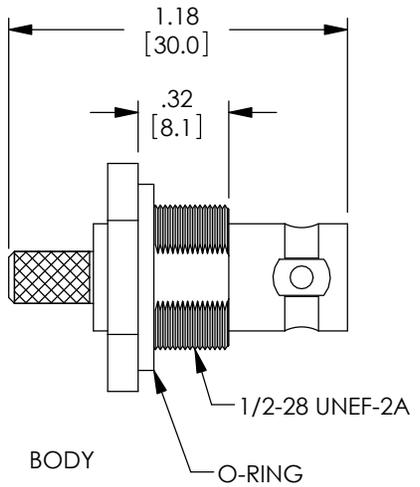


BODY O-RING 1/2-28 UNEF-2A



LOCK WASHER



LOCK NUT



RECOMMENDED PANEL CUT OUT

**NOTES:**  
 IMPEDANCE: 50 OHM  
 APPLICATION: RG58/U  
 ALL DIMENSIONS ARE FOR REFERENCE ONLY.  
 COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.  
**REGULATORY COMPLIANCE:**  
 ROHS, CE.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] .XXX = ±.005 [1.13]	APPROVALS DRAWN BY R.POLUBINSKI	DATE 8/7/07	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	CHECKED BY J.ROBERTS	8/7/07		CATEGORY COAXIAL	
	APPROVED BY D.FRISIELLO	8/7/07	PRODUCT DESCRIPTION BNC, FEMALE, BULKHEAD, RG58/U		
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. BAC522