

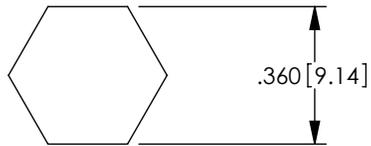
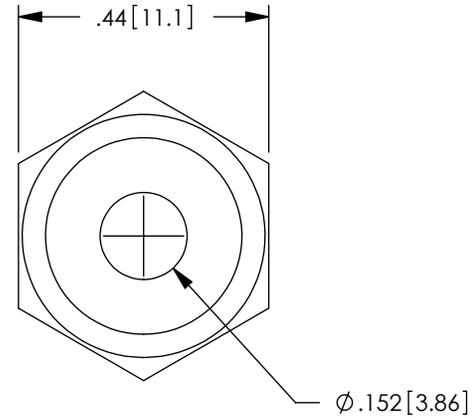


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
I	PRELIMINARY RELEASE	09/17/07	R.POLUBINSKI
A	INITIAL RELEASE	09/18/07	R.POLUBINSKI
B	ECN 3086: .360 WAS .316	11/21/07	D.CASTRO
C	ECN 5119: RE-MODEL COMPONENT AND NEW FORMAT	11/3/10	D.FRISIELLO

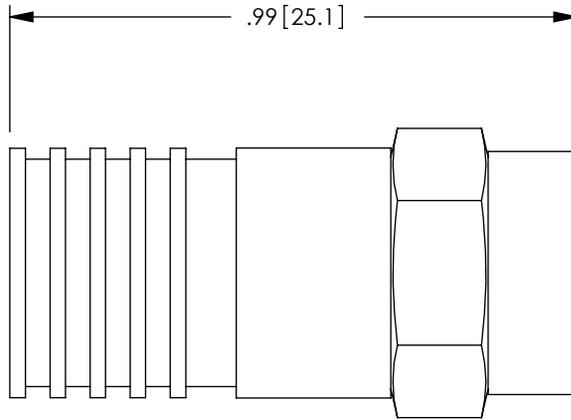

RECOMMENDED
FERRULE
CRIMP SIZE

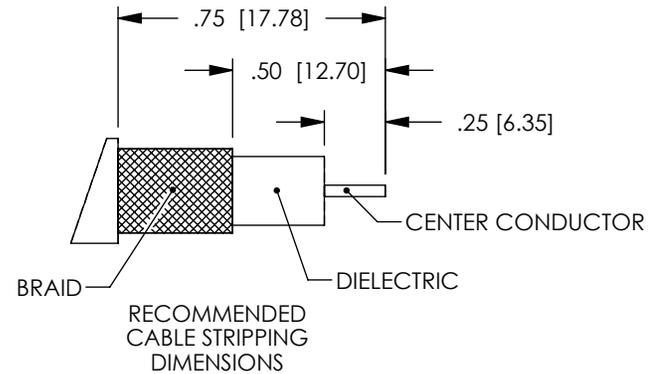

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL

RoHS Compliant ✓

NOTES:

1. RECOMMENDED APPLICATION: RG59A/U & RG59B/U COAXIAL CABLE.
2. IMPEDANCE: 75 OHM
3. O-RING BETWEEN CONNECTOR AND BODY PLUS SILICONE.
4. COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY R.POLUBINSKI	09/17/09		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY D.FRISIELLO	09/18/09	CATEGORY COAXIAL	
	APPROVED BY D.PARHAM	09/18/09	PRODUCT DESCRIPTION CONN SEALED F M RG59 CRIMP	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
			DWG. NO. BAC530	REV. C
			SCALE: NONE	CAD FILE: BAC530.SLDDRW
				SHEET 1 OF 1