


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/30/09	D.GRIFFIN
B	ECN8259 UPDATE PER NEW SPECS	02/18/16	B.PUCHASKI

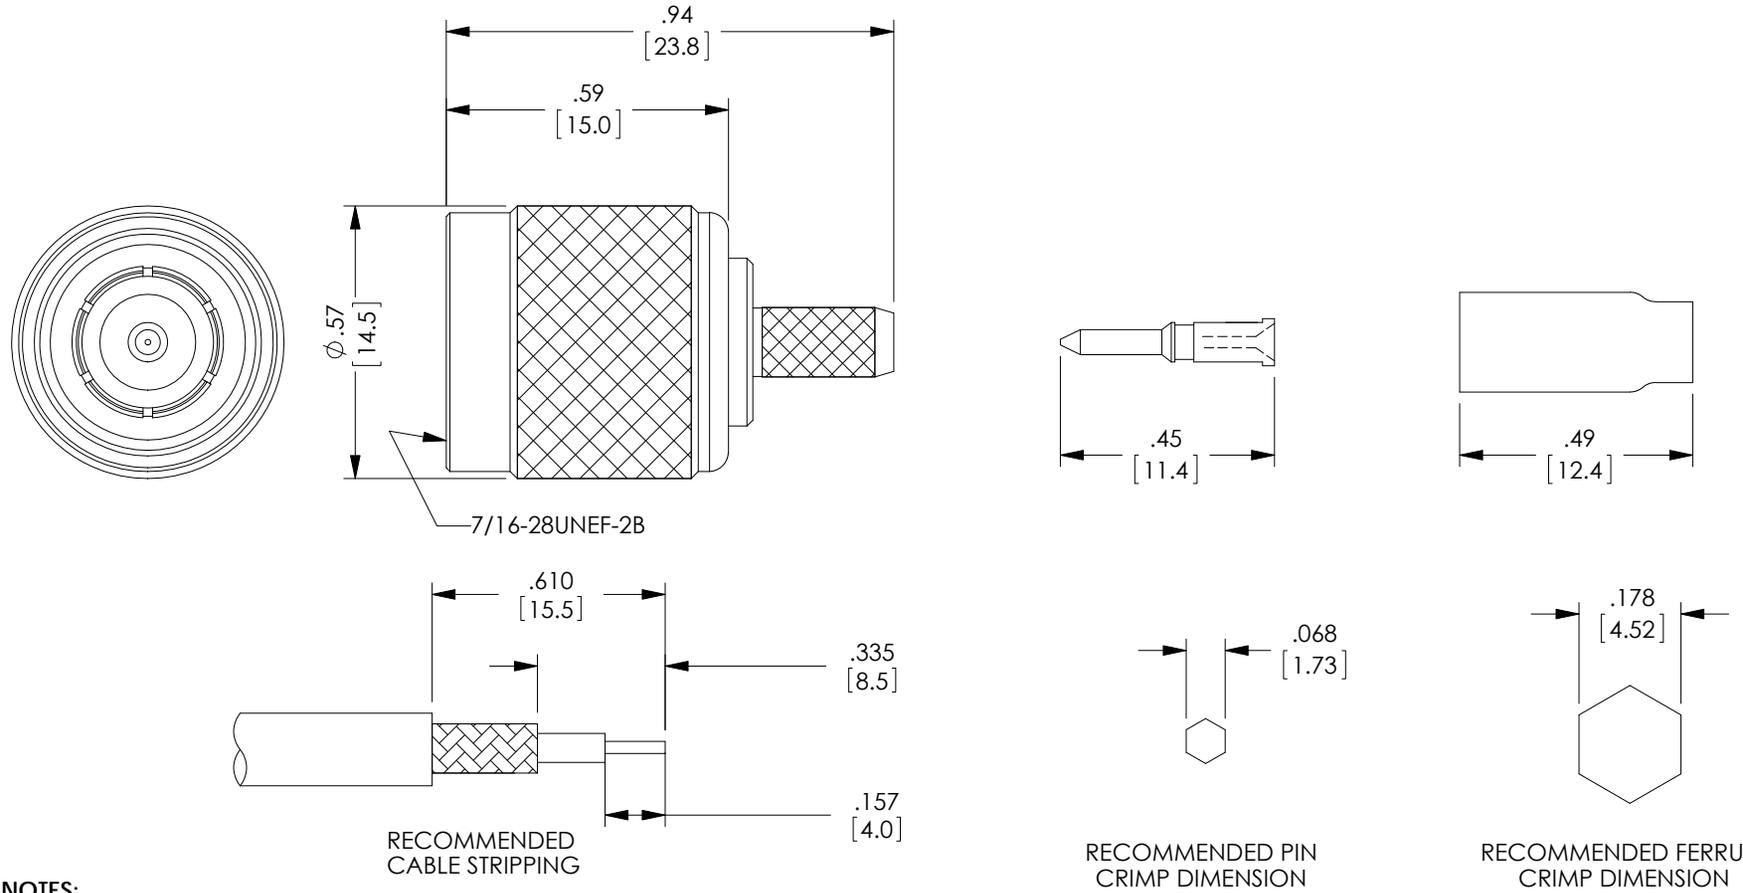

NOTES:

IMPEDANCE: 50 OHMS
 FREQUENCY RANGE: 0 - 11GHz
 VOLTAGE RATING: < 500 V rms
 INSULATOR RESISTANCE: > 5G OHM
 DIELECTRIC WITHSTANDING VOLTAGE: 1500V rms

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIO PKG-00012.

REGULATORY COMPLIANCE:
 CE2011/65/EU (RoHS DIRECTIVE)

RECOMMENDED PIN CRIMP DIMENSION

RECOMMENDED FERRULE CRIMP DIMENSION

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ±.005 [1.13]	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	DRAWN BY D.FRISIELLO	3/25/09			CATEGORY COAXIAL	
PROJECTION 	CHECKED BY D.CASTRO	3/25/09	PRODUCT DESCRIPTION TNC STR MALE RG174			
	APPROVED BY D.DOLCE	3/25/09			CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	SIZE A
SCALE: NONE			CAD FILE: BAC531.SLDDRW		SHEET 1 OF 1	