

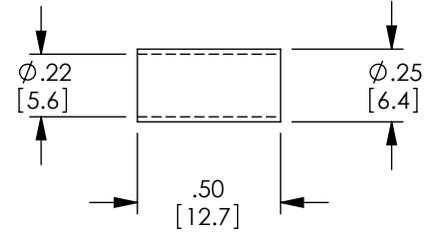
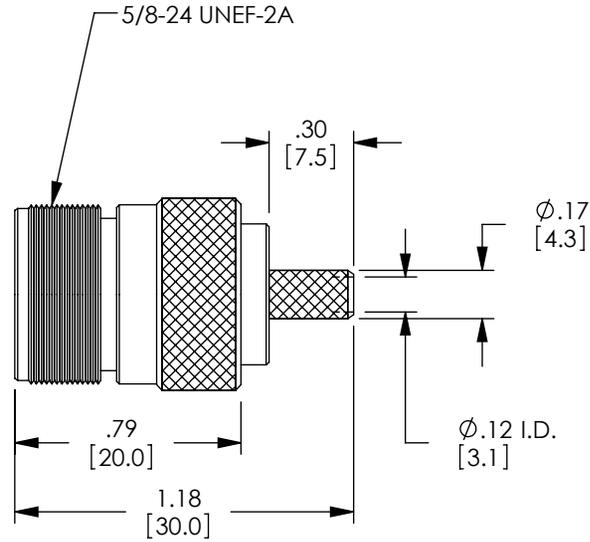


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	7/15/09	D.GRIFFIN



RECOMMENDED
CABLE STRIPPING

NOTES:

MATERIAL:
BODY: BRASS
CONTACT: PHOSPHOR BRONZE
INSULATOR: PTFE

FINISH:
BODY: NICKEL PLATING.
CONTACT: GOLD PLATING OVER NICKEL PLATING.

MISCELLANEOUS:
APPLICATIONS: RG223/U, RG142/U
IMPEDANCE: 50 OHM
MATING CYCLES: 500 MIN.
RECOMMENDED HEX CRIMP TOOL SIZE: .213" [5.41]

ALL DIMENSIONS ARE FOR REFERENCE ONLY.
SEE DRAWING FROM APPROVED SOURCE FOR
DETAILED DIMENSIONAL INFORMATION.
COMPONENTS ARE INDIVIDUALLY PACKAGED IN A
POLY BAG.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.02 .XXX = ±.005 ANGULAR TOLERANCES: ALL = ± 1° PROJECTION 	APPROVALS DRAWN BY D.FRISIELLO	DATE 7/9/09		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CHECKED BY D.CASTRO	7/9/09			CATEGORY COAXIAL
	APPROVED BY K.BURGNER	7/9/09	PRODUCT DESCRIPTION TYPE N STR JACK, RG223/U, RG142/U		
	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. BAC544	REV. A
SCALE: NONE		CAD FILE: BAC544.SLDDRW		SHEET 1 OF 1	