


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	4/3/09	D.GRIFFIN

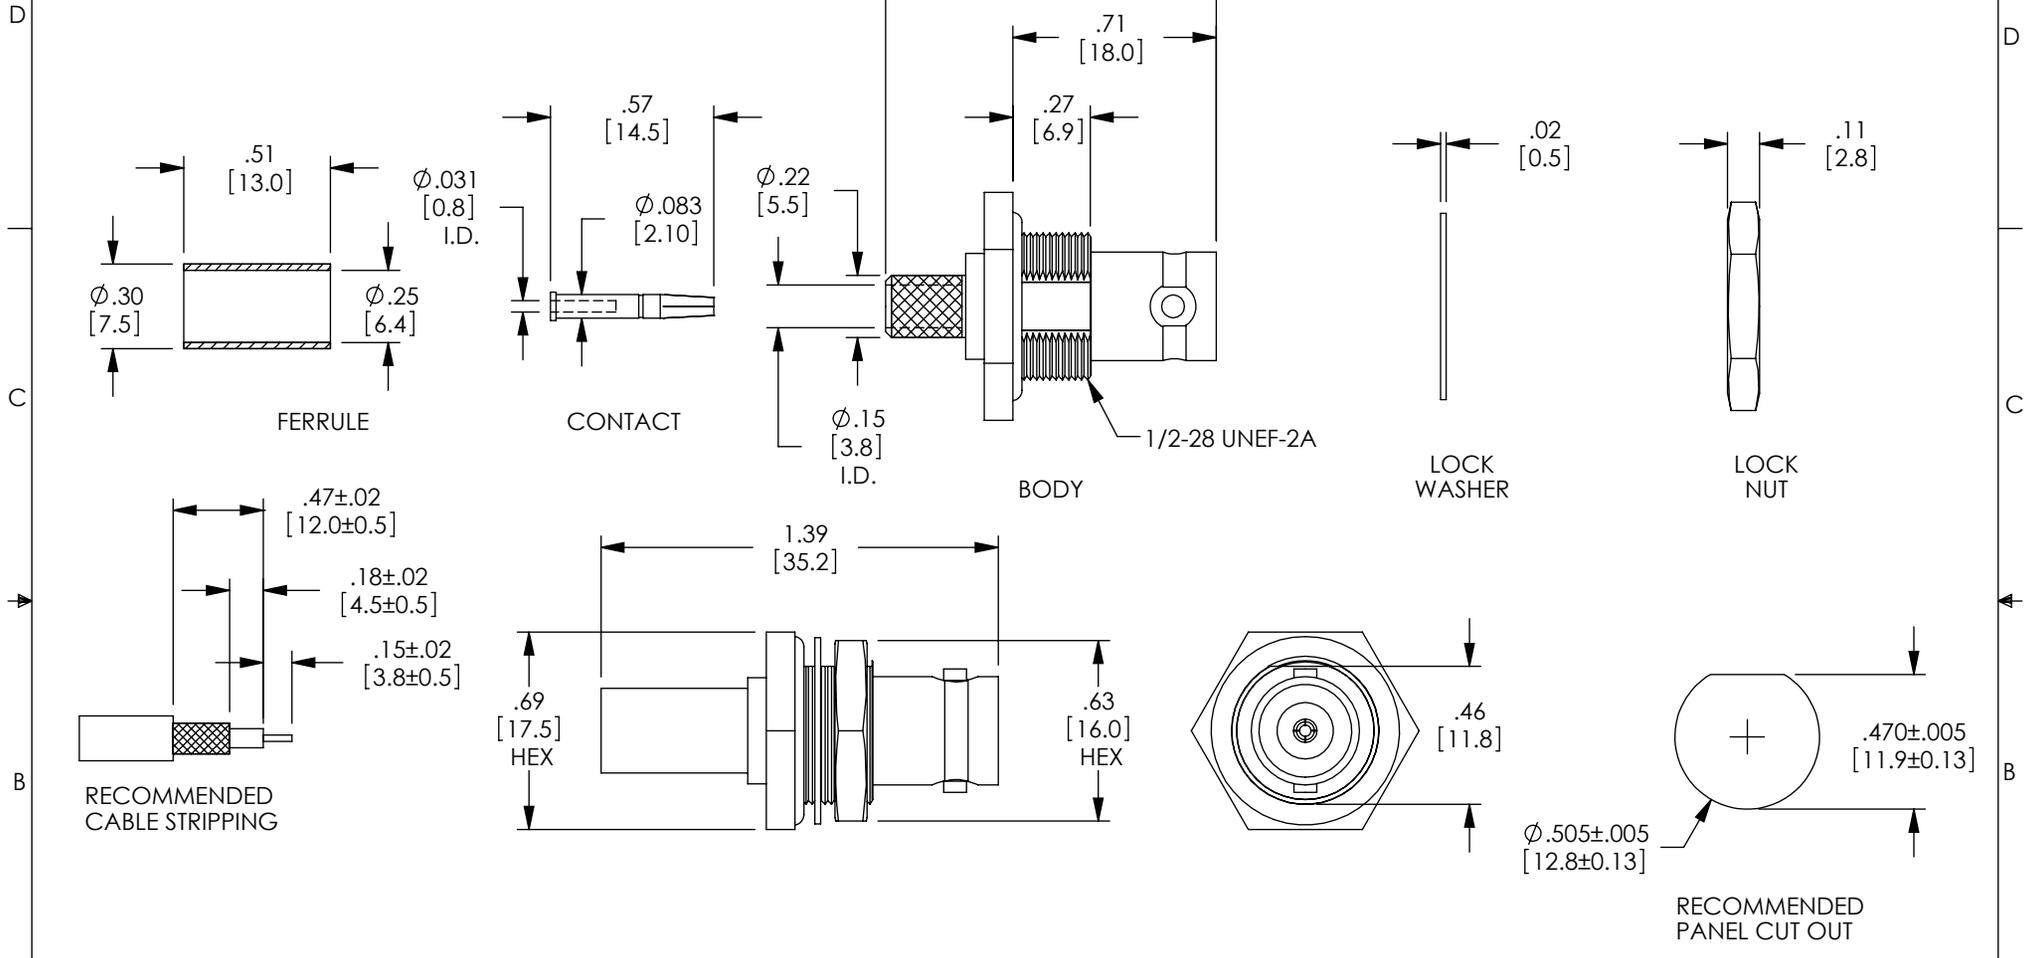

RoHS Compliant ✓

NOTES:
 IMPEDANCE: 75 OHM
 APPLICATION: RG59/U
 RECOMMENDED HEX CRIMP TOOL SIZE: .255 IN [6.48mm] & .068 IN [1.72mm]

ALL DIMENSIONS ARE FOR REFERENCE ONLY.
 COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN A POLY BAG.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 >12 [305] ≤ 60 [1524] = +2 [51] / -0 >60 [1524] ≤ 120 [3048] = +4 [102] / -0 >120 [3048] ≤ 300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: X = ± .3 .XX = ± .15	APPROVALS DRAWN BY D.FRISIELLO	DATE 3/31/09		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CHECKED BY D.CASTRO	DATE 3/31/09		CATEGORY COAXIAL	
	APPROVED BY D.DOLCE	DATE 3/31/09	PRODUCT DESCRIPTION BNC, FEMALE, BULKHEAD, RG59/U		
	PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. BAC552

SCALE: NONE | CAD FILE: BAC552.SLDDRW | SHEET 1 OF 1