

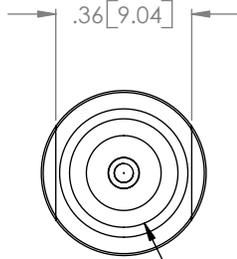


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	RELEASED FOR PRODUCTION	4/4/02	DFP
B	ECN 3165: UPDATE DWG FORMAT	1/21/08	D.GRIFFIN

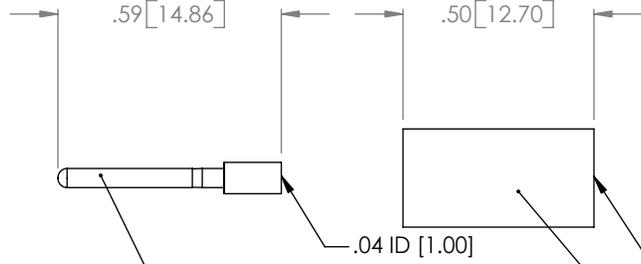

M8 X 0.75
INTERNAL THREAD

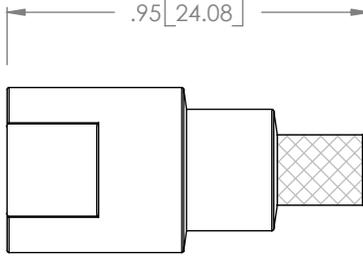


CENTER PIN

.04 ID [1.00]

.22 ID [5.64]

FERRULE

RECOMMENDED CABLE
STRIPPING DIMENSIONS

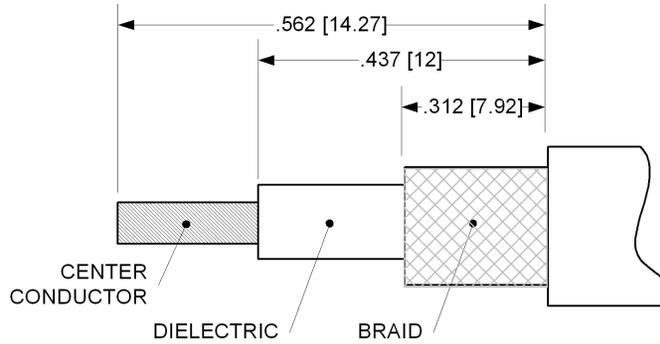


CENTER
CONDUCTOR

DIELECTRIC

BRAID

RECOMMENDED CRIMP
FOR FERRULE

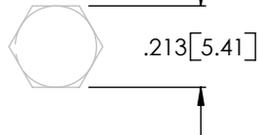


NOTES:

MATERIAL:
BODY: BRASS
CENTER PIN: BRASS
INSULATOR: ACETAL

FINISH:
BODY: NICKEL PLATE
CENTER PIN: GOLD OVER NICKEL PLATE

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
TOLERANCES TO BE:
.X ±.1 [2.5] ANGLES ±2°
.XX ±.01 [.25]
.XXX ±.005 [.13]
OVERALL CABLE LENGTH TOL:
≤ 60 [1524] +3 [76.2] / -0
> 60 [1524] +5% / -0%



APPROVALS	DATE
DRAWN BY D PARHAM	3/22/2002
CHECKED BY T CLARK	3/25/2002
APPROVED BY C MCCORMICK	3/25/2002

CONFIGURATION DETAILS OF
UNDIMENSIONED FEATURES
MAY VARY

	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	CATEGORY COAXIAL		
PRODUCT DESCRIPTION CONN FME M RG58 CRIMP			
SIZE A	FSCM NO. 43321	DWG. NO. BAC8015	REV. B
SCALE: NONE		CAD FILE: BAC8015.SLDDRW	SHEET 1 OF 1