
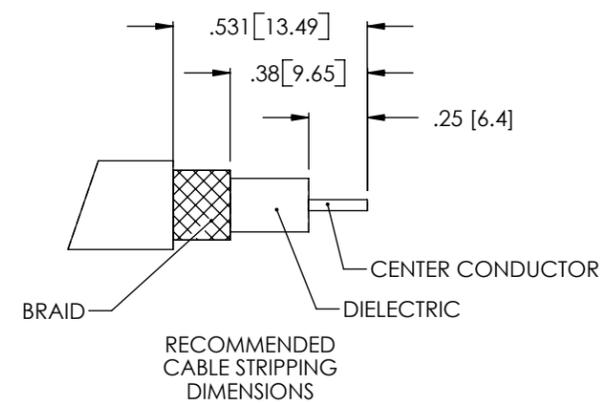
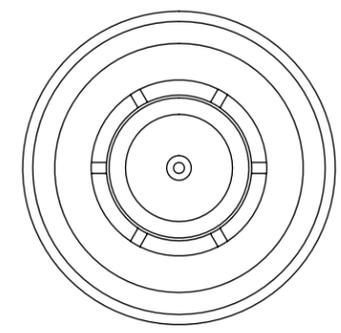
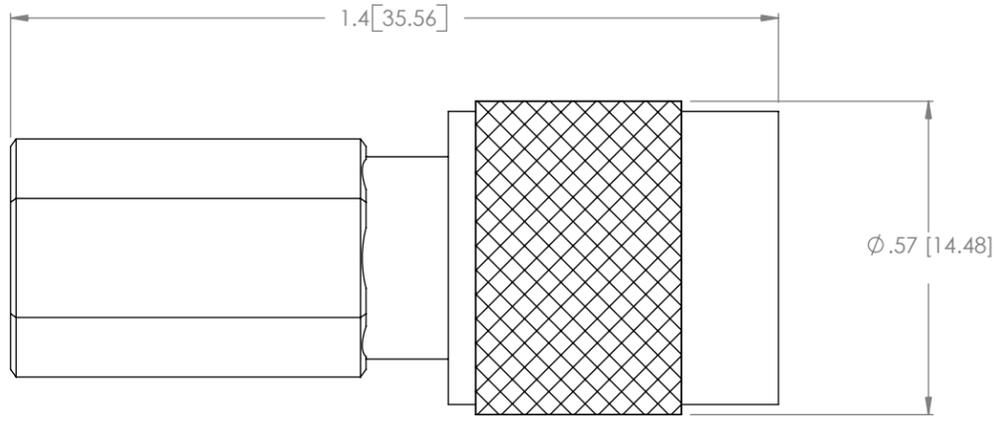


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|-----------|---|----------|------------|
| REV | DESCRIPTION | DATE | CHANGED BY |
| A | RELEASED FOR PRODUCTION | 11/13/01 | MCCORMICK |
| B | ECN# 2280 ADDED COMPONENT SPECS AND NOTES | 01/18/06 | MCCORMICK |
| C | ECN 3167: UPDATE DWG FORMAT | 1/22/08 | D.GRIFFIN |

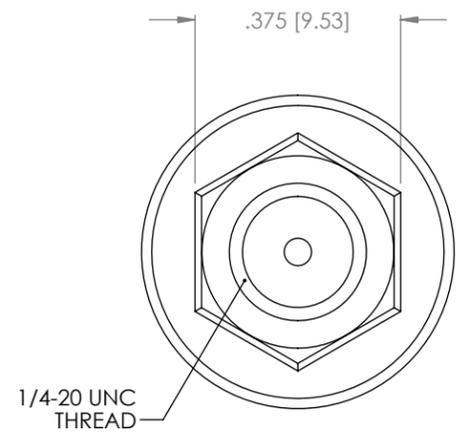

NOTES:

MATERIAL:
 BODY: BRASS
 PIN: BRASS
 INSULATOR: ACETAL

FINISH:
 BODY: NICKEL PLATE
 PIN: GOLD PLATE

ELECTRICAL:
 IMPEDANCE: 75 OHM

PACKAGING:
 INDIVIDUALLY PACKAGE EACH ASSEMBLY UTILIZING APPROPRIATE SIZED BAG


APPLICATION:
 RG59 COAXIAL CABLE ASSEMBLIES

TERMINATION:
 TO INSTALL PLUG, INSERT STRIPPED CABLE END INTO REAR OF PLUG, PLACING CENTER CONDUCTOR INTO SPRING SLOT IN PIN. TWIST THE PLUG CLOCKWISE WHILE PUSHING THE CABLE INTO PLUG. 2-1/2 TO 3 TURNS ARE NEEDED TO PROVIDE A RELIABLE TERMINATION.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED,
 DIMENSIONS ARE IN INCHES [mm]
 TOLERANCES TO BE:
 .X ±.1 [2.5] ANGLES ±2°
 .XX ±.01 [.25]
 .XXX ±.005 [.13]
 OVERALL CABLE LENGTH TOL:
 ≤ 60 [1524] +3 [76.2] / -0
 > 60 [1524] +5% / -0%

| APPROVALS | DATE |
|--------------------------|------------|
| DRAWN BY C.MCCORMICK | 11/06/2001 |
| CHECKED BY ENG | 11/06/2001 |
| APPROVED BY R.CARRICK | 11/06/2001 |



L-com 45 BEECHWOOD DRIVE
 NORTH ANDOVER, MA
 01845

CATEGORY: COAXIAL
 PRODUCT DESCRIPTION: CONN TNC M RG59 TWIST ON

| SIZE | FSCM NO. | DWG. NO. | REV. |
|----------|--------------|-----------|----------|
| B | 43321 | BAC933-59 | C |

SCALE: 1:1 CAD FILE: BAC933-59.SLDDRW SHEET 1 OF 1