


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	RELEASED FOR PRODUCTION	11/20/01	MCCORMICK
B	ECN# 2280 ADDED COMPONENT SPECS AND NOTES	01/19/06	MCCORMICK
C	ECN3192: UPDATE DWG FORMAT	2/6/08	D.GRIFFIN



CABLE ENTRY DIAMETER

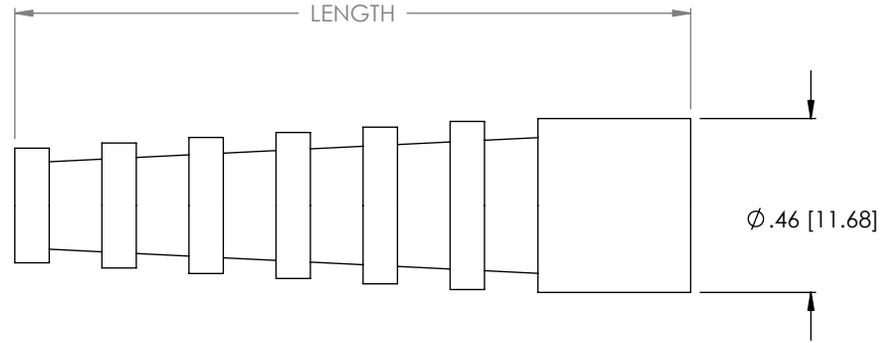


TABLE			
MODEL NUMBER	COLOR	LENGTH IN [MM]	DIAMETER IN [MM]
BIF-P0-58	BLACK	1.77 (45)	.197 (5)
BIF-P2-58	RED	1.77 (45)	.197 (5)
BIF-P5-58	GREEN	1.77 (45)	.197 (5)
BIF-P6-58	BLUE	1.77 (45)	.197 (5)
BIF-P9-58	WHITE	1.77 (45)	.197 (5)
BIF-P0-59/62	BLACK	1.71 (43.5)	.260 (6.6)
BIF-P2-59/62	RED	1.71 (43.5)	.260 (6.6)
BIF-P5-59/62	GREEN	1.71 (43.5)	.260 (6.6)
BIF-P6-59/62	BLUE	1.71 (43.5)	.260 (6.6)
BIF-P9-59/62	WHITE	1.71 (43.5)	.260 (6.6)

NOTES:

MATERIAL:
FLEXIBLE THERMOPLASTIC

PACKAGING:
BULK PACKAGE TEN (10) UTILIZING APPROPRIATE SIZED BAG


APPLICATION:
BOOTS ARE INTENDED FOR USE WITH COMMON RG58, RG59 & RG62 CABLE AS INDICATED BY THE SUFFIX NUMBERS OF THE MODEL NUMBERS.

L-com 45 BEECHWOOD DRIVE
NORTH ANDOVER, MA 01845

CATEGORY COAXIAL

PRODUCT DESCRIPTION BEND PROTECTOR RG58 BLK

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]
TOLERANCES TO BE:
.X ±.1 [2.5] ANGLES ±2°
.XX ±.01 [.25]
.XXX ±.005 [.13]
OVERALL CABLE LENGTH TOL:
≤ 60 [1524] +3 [76.2] / -0
> 60 [1524] +5% / -0%



APPROVALS	DATE
DRAWN BY MCCORMICK	11/20/01
CHECKED BY D.PARHAM	11/20/01
APPROVED BY R.CARRICK	11/20/01

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	BIF-P0-58	C

SCALE: NONE | CAD FILE: BIF-P0-58.SLDDRW | SHEET 1 OF 1