
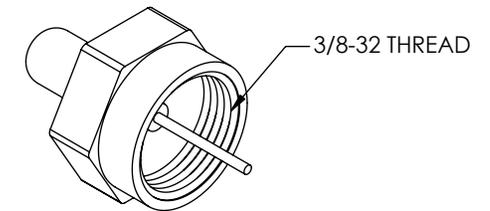
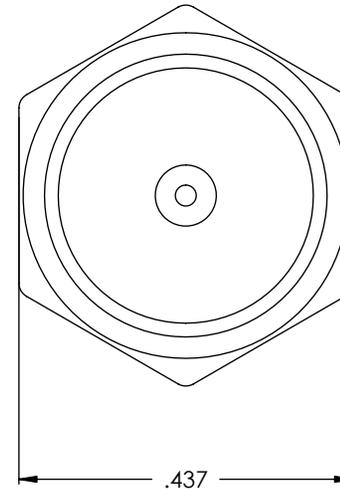


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	UPDATED TO SOLIDWORKS (1)	08/14/02	MCCORMICK
B	REVISED DIMENSION AND NOTES	08/16/02	MCCORMICK
C	ECN 3000: OVERALL LENGTH REMOVED AND REF LENGTH ADDED	09/18/07	R.POLUBINSKI

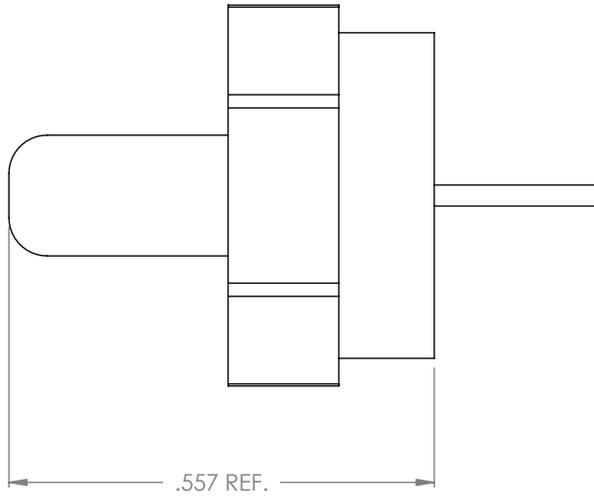

- NOTES:
1. MATERIAL: ZINC ALLOY (DIECAST) BODY
  2. INSULATOR: POLYPROPYLENE
  3. RESISTIVE IMPEDANCE: 75 OHMS
  4. POWER: 1/4 WATT @ 25°C
  5. PACKAGED 10 PER BAG

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONS ARE IN INCHES  
TOLERANCES ARE:  
.X ±.1  
.XX ±.05  
.XXX ±.005  
CABLE LENGTH TOLERANCE  
<300" ±5% >300" ±2%

APPROVALS	DATE
DRAWN BY MCCORMICK	08/14/02
CHECKED BY D.PARHAM	08/14/02
APPROVED BY R.CARRICK	08/14/02

**L-com**<sup>®</sup> 45 BEECHWOOD DRIVE  
CONNECTIVITY PRODUCTS NORTH ANDOVER, MA  
01845

PRODUCT DESCRIPTION  
**75 OHM "F" TERMINATION**

DRAWING TITLE  
**OUTLINE DRAWING**

SIZE	FSCM NO.	DWG. NO.	REV.
<b>A</b>	<b>43321</b>	<b>BT75M</b>	<b>C</b>
SCALE 1:2	CAD FILE: BT75M.SLDDRW		SHEET 1 OF 1

CONFIGURATION DETAILS OF  
UNDIMENSIONED FEATURES  
MAY VARY