
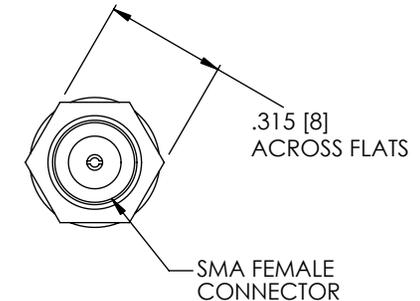



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	RELEASED FOR PRODUCTION	03/28/02	MCCORMICK
B	REVISED BODY PLATING	10/01/03	MCCORMICK
C	ECN 1728 REVISED TOLERANCE	04/22/04	MCCORMICK
D	ECN 3194: UPDATE DWG FORMAT	2/8/08	D.GRIFFIN



NOTES:

**MATERIAL:**  
 BODY: BRASS  
 CONTACT: BRASS  
 COLOR CAP 50 OHM GREEN: PE  
 RESISTOR: METAL  
 RING: BRASS  
 INSULATOR: PTFE

**FINISH:**  
 BODY: GOLD PLATE  
 CONTACT: GOLD PLATE  
 RING: GOLD PLATE

**ELECTRICAL:**  
 IMPEDANCE: 50 OHMS

**PACKAGING:**  
 INDIVIDUALLY PACKAGE IN A POLYBAG

**RoHS Compliant** ✓

	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CATEGORY <b>COAXIAL</b>	PRODUCT DESCRIPTION <b>SMA CABLE JACK, STAINLESS STEEL</b>
SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>BTS5F</b>
SCALE: NONE   CAD FILE: BTS5F.SLDDRW		SHEET 1 OF 1

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] TOLERANCES TO BE: .X ±.1 [2.5] ANGLES ±2° .XX ±.01 [.25] .XXX ±.005 [.13] OVERALL CABLE LENGTH TOL: ≤ 60 [1524] +3 [76.2] / -0 > 60 [1524] +5% / -0%	APPROVALS DRAWN BY C.MCCORMICK	DATE 03/28/2002
	CHECKED BY D.PARHAM	03/28/2002
	APPROVED BY R.CARRICK	03/28/2004
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	

