
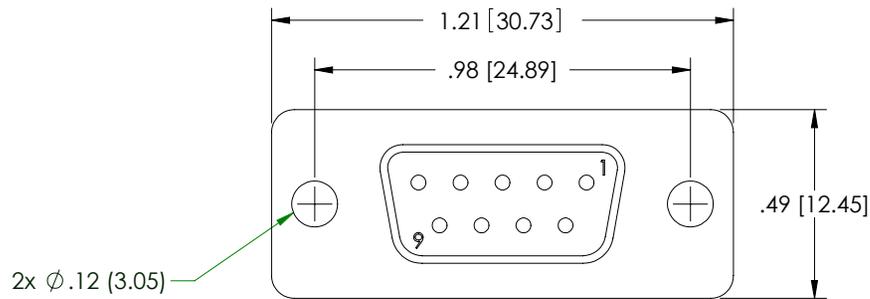


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/08/03	B.MAZEJKA
B	ECN# 2731 - ADDED ROHS STAMP	10/23/07	D.GRIFFIN
C	ECN 3388: ADD PACKAGING NOTE/UPDATE FORMAT	6/12/08	D.GRIFFIN
D	ECN#3680, ADDED PACKAGING TABLE	2008.10.30	E. STAUBLE

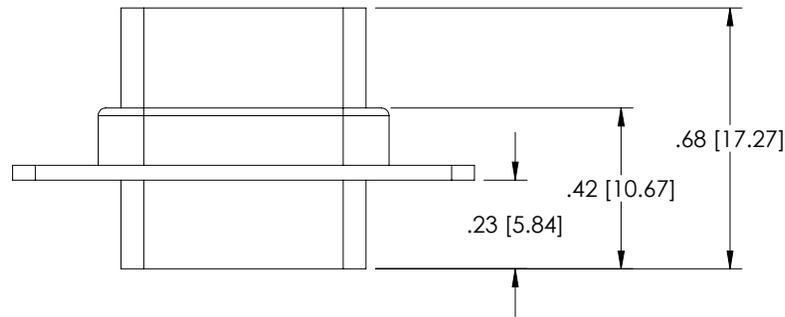

**NOTES:**

**MATERIAL:**

SHELL: STEEL  
INSULATOR: PBT W/ GLASS FIBER FILL (UL 94V-0 RATED)

**FINISH:**

FRONT SHELL: BRIGHT TIN/NICKEL PLATED  
REAR SHELL: BRIGHT TIN PLATED

CATALOG #	PACKAGING
C&P9F	1/BAG
C&P9F-TRAY	50/TRAY

**RoHS Compliant** ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]  OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%  ALL OTHER DIMENSIONAL TOLERANCES: .X = .3 .XX = .15  PROJECTION 	APPROVALS B.MAZEJKA	DATE 11/10/2003		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CHECKED BY C.McCORMICK	DATE 12/08/2003			CATEGORY DSUB
	APPROVED BY D.PARHAM	DATE 12/08/2003	PRODUCT DESCRIPTION DB9F CRIMP & POKE CONNECTOR		
	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. C_P9F	REV. <b>D</b>
REF	SCALE: NONE		CAD FILE: C_P9F.SLDDRW		
				SHEET 1 OF 1	