


8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/25/11	D.GRIFFIN
B	ECN 8241: RELEASED TO SUZHOU, NEW FORMAT, ADD ROHS NOTE	2/2/16	S.LI

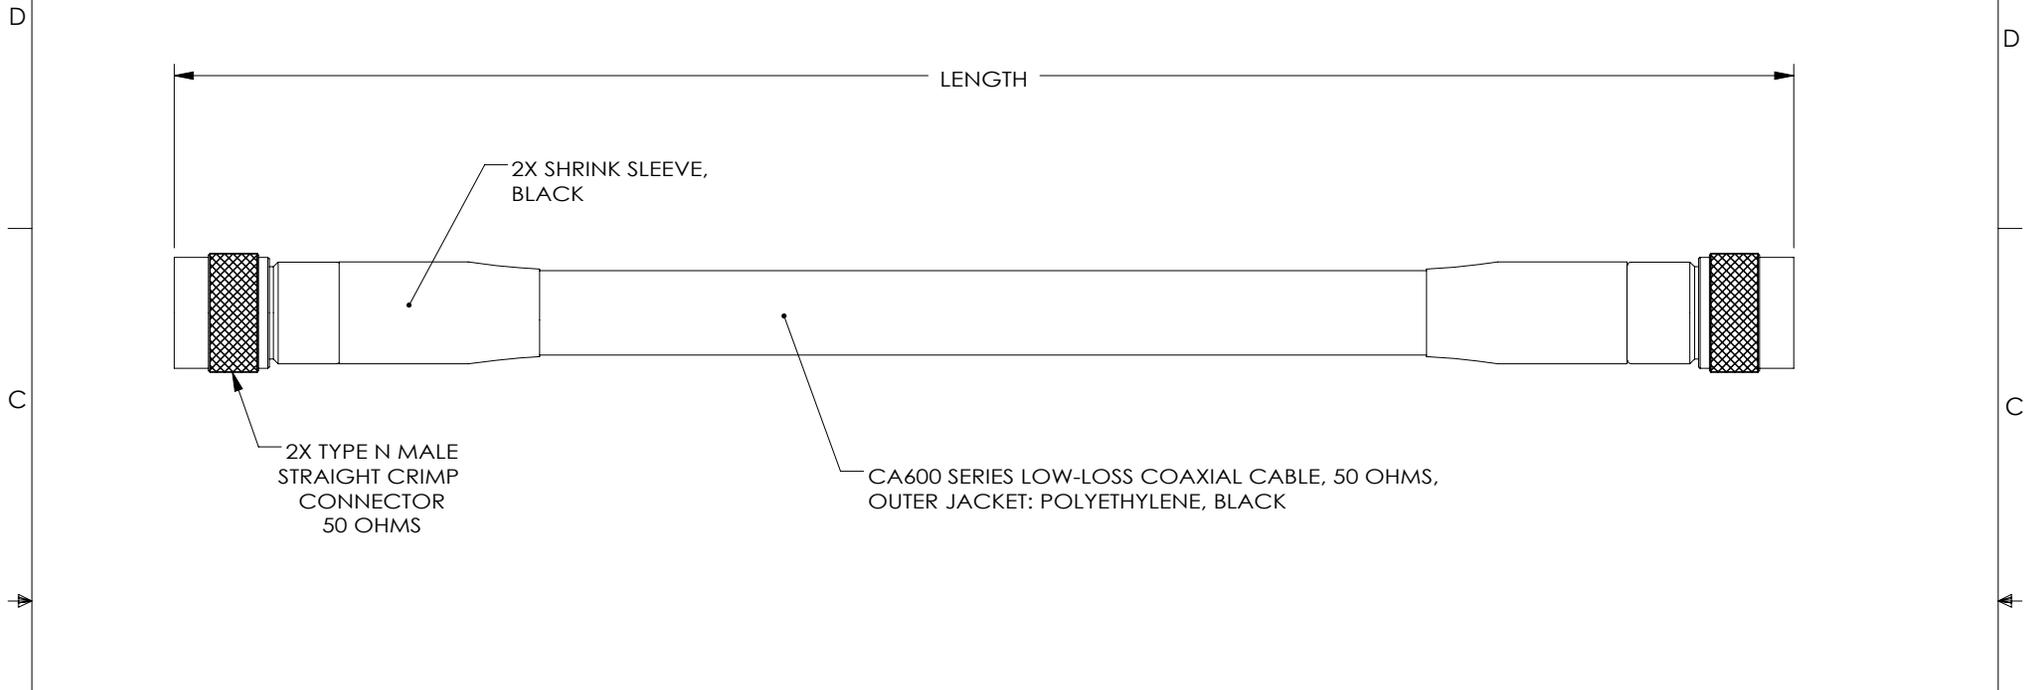

LENGTH CODE CHART		
CABLE# & LENGTH	LENGTH SYMBOL	EXAMPLES OF PART# USED
CA-6NMNMXXX	WHERE XXX = LENGTH IN FEET	CA-6NMNM010 (10 FEET)
CA-6NMNMNXX	WHERE NXX = LENGTH IN INCHES	CA-6NMNM16 (16 INCHES)
CA-6NMNM \overline{MXX}	WHERE MXX = LENGTH IN METERS	CA-6NMNM07 (7 METERS)
CA-6NMNM \overline{XMX}	WHERE XMX = LENGTH IN DECIMAL METERS	CA-6NMNM3M5 (3.5 METERS)

NOTES:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL RECEIVE INSERTION LOSS TEST PER L-COM SPECIFICATIONS.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 > 12 [305] ≤ 60 [1524] = +2 [51] / -0 > 60 [1524] ≤ 120 [3048] = +4 [102] / -0 > 120 [3048] ≤ 300 [7620] = +6 [152] / -0 > 300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = \pm .2 [5.08] .XX = \pm .02 [51] .XXX = \pm .005 [13]	APPROVALS DRAWN BY D. CASTRO CHECKED BY D. PARHAM APPROVED BY K. BURGNER	DATE 3/1/11 3/1/11 3/1/11	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	CATEGORY COAXIAL	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			PRODUCT DESCRIPTION CA,N-Male to N-Male 600 SERIES	
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. CA-6NMNM
			SCALE: NONE	CAD FILE: CA-6NMNM.SLDDRW	REV. B SHEET 1 OF 1