


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	6/2/10	D.GRIFFIN
B	ECN 5373: REVISED CABLE JACKET TO BLACK THERMOPLASTIC ELASTOMER	3/9/11	D.FRISIELLO

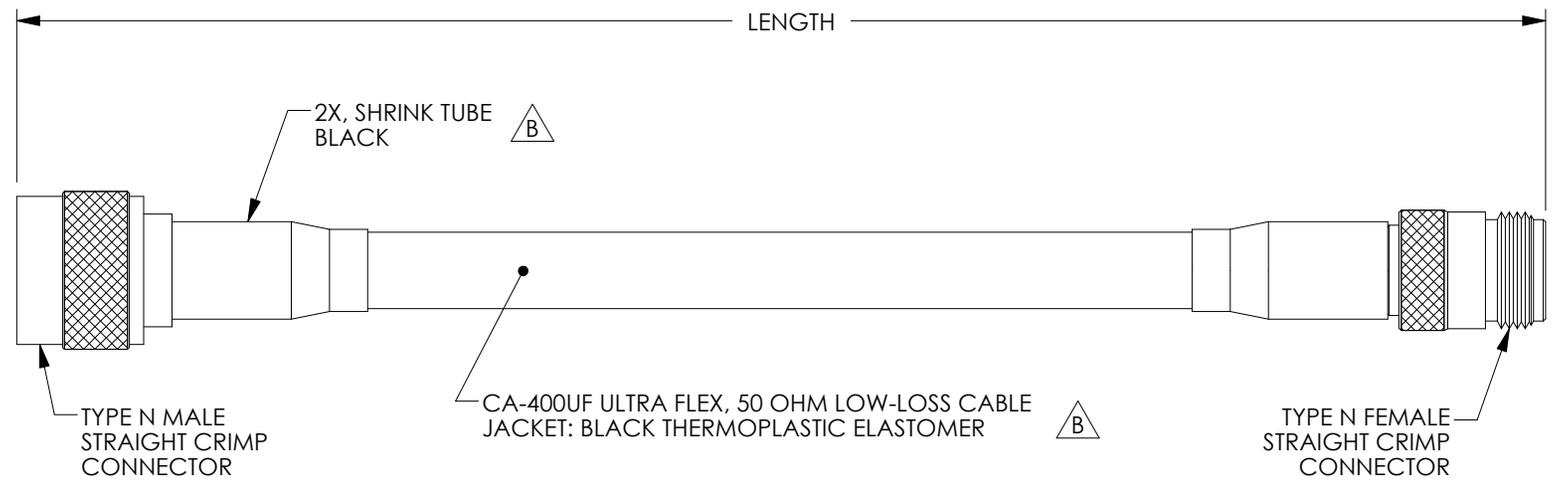

LENGTH CODE CHART		
CABLE# & LENGTH	LENGTH SYMBOL	EXAMPLES OF PART# USED
CA-NMNFHXXX	WHERE XXX = LENGTH IN FEET	CA-NMNFH010 (10 FEET)
CA-NMNFHNXX	WHERE NXX = LENGTH IN INCHES	CA-NMNFHN16 (16 INCHES)
CA-NMNFHMXX	WHERE MXX = LENGTH IN METERS	CA-NMNFHM07 (7 METERS)
CA-NMNFHXXM	WHERE XM = LENGTH IN DECIMAL METERS	CA-NMNFH3M5 (3.5 METERS)

NOTES:  
 CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.  
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY D.FRISIELLO	6/2/10		CATEGORY <b>COAXIAL</b>
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	CHECKED BY K.BURGNER	6/2/10	PRODUCT DESCRIPTION <b>CA, N-M/N-F CA-400UF</b>	
	APPROVED BY K.BURGNER	6/2/10		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR
PROJECTION 	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>CA-NMNFH</b>	REV. <b>B</b>
SCALE: NONE		CAD FILE: CA-NMNFH.SLDDRW		SHEET 1 OF 1