


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/10/11	D.GRIFFIN
B	ECN 8241: RELEASED TO SUZHOU, NEW FORMAT, UPDATE ROHS	2/2/16	S.LI

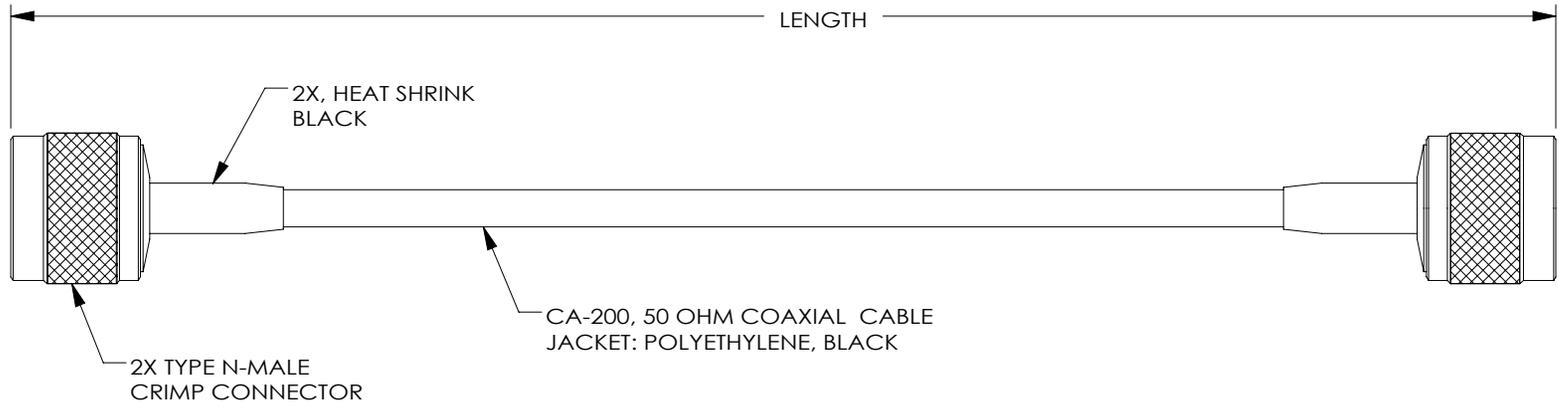

LENGTH CODE CHART		
CABLE# & LENGTH	LENGTH SYMBOL	EXAMPLES OF PART# USED
CA-NMNME <u>XXX</u>	WHERE XXX = LENGTH IN FEET	CA-NMNME010 (10 FEET)
CA-NMNME <u>NXX</u>	WHERE NXX = LENGTH IN INCHES	CA-NMNME16 (16 INCHES)
CA-NMNME <u>MXX</u>	WHERE MXX = LENGTH IN METERS	CA-NMNMEM07 (7 METERS)
CA-NMNME <u>XM</u>	WHERE XM = LENGTH IN DECIMAL METERS	CA-NMNME3M5 (3.5 METERS)

**NOTES:**

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL RECEIVE INSERTION LOSS TEST PER L-COM SPECIFICATIONS.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845			
	DRAWN BY D. CASTRO	10/6/11		CATEGORY <b>COAXIAL</b>		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ±.005 [13]	CHECKED BY D. PARHAM	10/6/11	PRODUCT DESCRIPTION <b>CA,CA-200 N-MALE / N-MALE</b>			
	APPROVED BY K. BURGNER	10/6/11		<table border="1"> <tr> <td>SIZE <b>A</b></td> <td>FSCM NO. <b>43321</b></td> <td>DWG. NO. <b>CA-NMNME</b></td> <td>REV. <b>B</b></td> </tr> </table>	SIZE <b>A</b>	FSCM NO. <b>43321</b>
SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>CA-NMNME</b>	REV. <b>B</b>			
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SCALE: NONE	CAD FILE: CA-NMNME.SLDDRW			
			SHEET 1 OF 1			