


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	6/3/10	D.GRIFFIN
B	ECN 5373: REVISED CABLE JACKET TO BLACK THERMOPLASTIC ELASTOMER	3/9/11	D.FRISIELLO

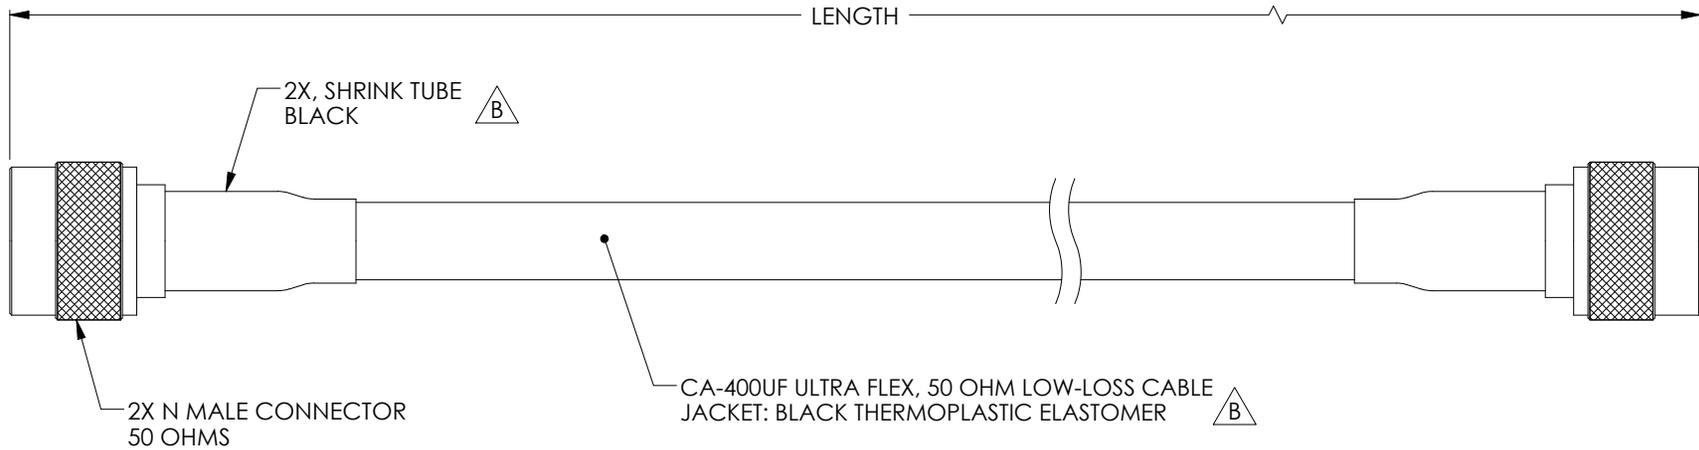

LENGTH CODE CHART		
CABLE# & LENGTH	LENGTH SYMBOL	EXAMPLES OF PART# USED
CA-NMNMHXXX	WHERE XXX = LENGTH IN FEET	CA-NMNMH010 (10 FEET)
CA-NMNMHNXX	WHERE NXX = LENGTH IN INCHES	CA-NMNMH16 (16 INCHES)
CA-NMNMHMXX	WHERE MXX = LENGTH IN METERS	CA-NMNMHM07 (7 METERS)
CA-NMNMHXXM	WHERE XMX = LENGTH IN DECIMAL METERS	CA-NMNMH3M5 (3.5 METERS)

RoHS Compliant ✓

NOTES:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D. CASTRO	6/2/10	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ±.005	CHECKED BY K. BURGNER	6/2/10	CATEGORY COAXIAL
	APPROVED BY K. BURGNER	6/2/10	PRODUCT DESCRIPTION CA,NM / NM
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A FSCM NO. 43321 DWG. NO. CA-NMNMH REV. B SCALE: NONE CAD FILE: CA-NMNMH.SLDDRW SHEET 1 OF 1