


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/02/13	D.GRIFFIN

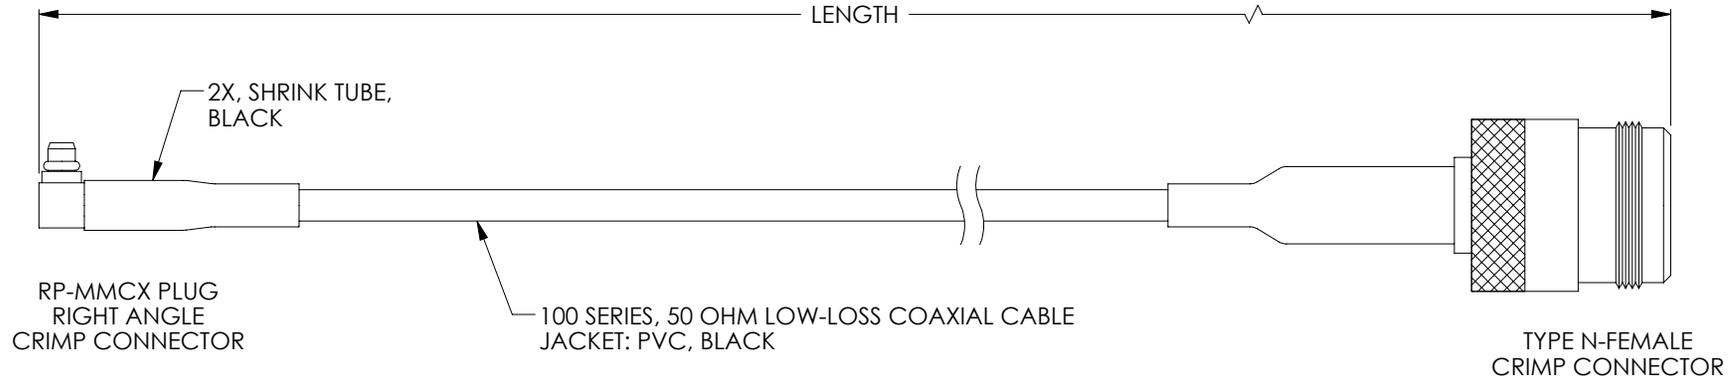

LENGTH CODE CHART		
CABLE# & LENGTH	LENGTH SYMBOL	EXAMPLES OF PART# USED
CA-RMMNFCXXX	WHERE XXX = LENGTH IN FEET	CA-RMMNFC010 (10 FEET)
CA-RMMNFCNXX	WHERE NXX = LENGTH IN INCHES	CA-RMMNFCN16 (16 INCHES)
CA-RMMNFCMXX	WHERE MXX = LENGTH IN METERS	CA-RMMNFCM07 (7 METERS)
CA-RMMNFCXMX	WHERE XMX = LENGTH IN DECIMAL METERS	CA-RMMNFC3M5 (3.5 METERS)

**RoHS Compliant** ✓

- NOTES:
1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
  2. CABLE ASSEMBLY SHALL RECEIVE INSERTION LOSS TEST PER L-COM SPECIFICATIONS.
  3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\leq 12$ [305] = +1 [25] / -0 $> 12$ [305] $\leq 60$ [1524] = +2 [51] / -0 $> 60$ [1524] $\leq 120$ [3048] = +4 [102] / -0 $> 120$ [3048] $\leq 300$ [7620] = +6 [152] / -0 $> 300$ [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	APPROVALS DRAWN BY B.PUCHASKI CHECKED BY K. BURGNER APPROVED BY K. BURGNER	DATE 01/02/13 01/02/13 01/02/13	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	CATEGORY <b>COAXIAL</b>		PRODUCT DESCRIPTION <b>CA, CA-100 RP-MMCX/NF</b>	
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>CA-RMMNFC</b>	REV. <b>A</b>
SCALE: NONE		CAD FILE: CA-RMMNFC.SLDDRW		SHEET 1 OF 1	