


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	7/31/12	D.GRIFFIN

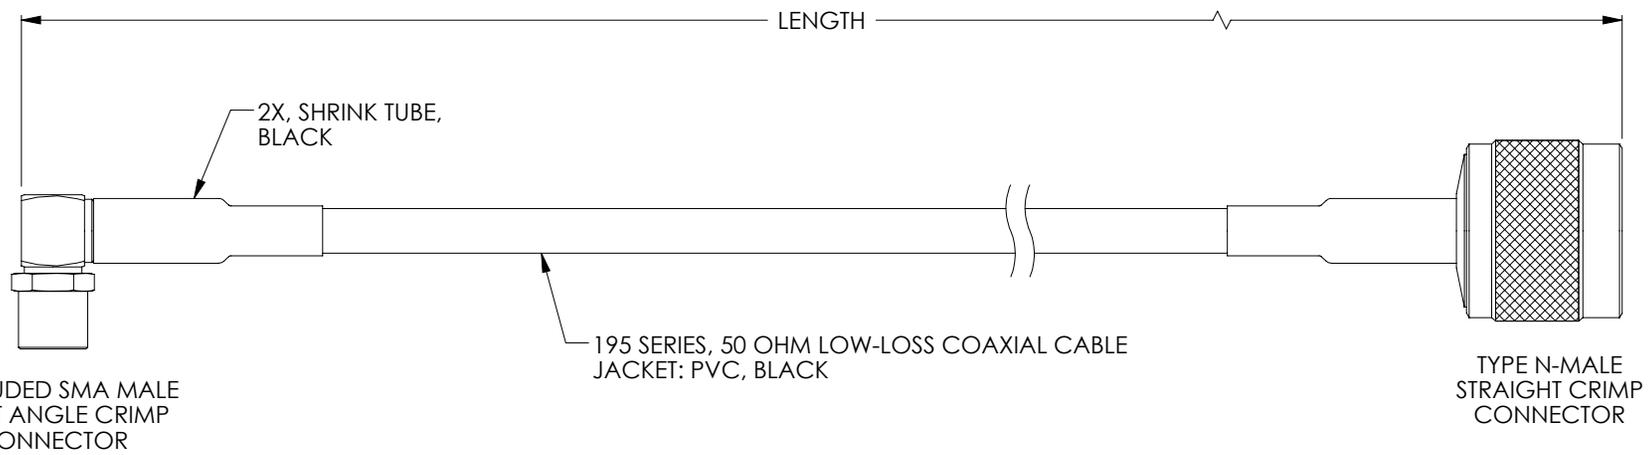

LENGTH CODE CHART		
CABLE# & LENGTH	LENGTH SYMBOL	EXAMPLES OF PART# USED
CA-SSMNMA $\underline{\text{XXX}}$	WHERE XXX = LENGTH IN FEET	CA-SSMNMA010 (10 FEET)
CA-SSMNMA $\underline{\text{NXX}}$	WHERE NXX = LENGTH IN INCHES	CA-SSMNMA16 (16 INCHES)
CA-SSMNMA $\underline{\text{MXX}}$	WHERE MXX = LENGTH IN METERS	CA-SSMNMA07 (7 METERS)
CA-SSMNMA $\underline{\text{XXM}}$	WHERE XXM = LENGTH IN DECIMAL METERS	CA-SSMNMA3M5 (3.5 METERS)

NOTES:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL RECEIVE INSERTION LOSS TEST PER L-COM SPECIFICATIONS.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 > 12 [305] ≤ 60 [1524] = +2 [51] / -0 > 60 [1524] ≤ 120 [3048] = +4 [102] / -0 > 120 [3048] ≤ 300 [7620] = +6 [152] / -0 > 300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = $\pm .2$.XX = $\pm .02$.XXX = $\pm .005$	APPROVALS DRAWN BY D. DESJARDIN CHECKED BY P. PESA APPROVED BY P. PESA	DATE 7/31/12 7/31/12 7/31/12	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	CATEGORY COAXIAL PRODUCT DESCRIPTION CA, 195 SHR SMA-M/NM		
PROJECTION 	SIZE A	FSCM NO. 43321	DWG. NO. CA-SSMNMA	REV. A
SCALE: NONE		CAD FILE: CA-SSMNMA.SLDDRW		SHEET 1 OF 1